

COMPUTING

COMX-P40x0-ENP2 Modules

Ruggedized QorIQ® Modules

Data Sheet

Ruggedized and extended temperature COM Express modules with NXP QorIQ processing power

- NXP QorIQ P4040 or P4080 processor at 1.2GHz
- 2 or 4 GB of soldered-down DDR3-1333 ECC memory
- 95 mm x 125 mm COM Express Basic footprint
- -40 °C to +71 °C operating temperature range
- Shock and vibration hardened
- 16 configurable SERDES lanes available for maximum flexibility


The COMX-P40x0-ENP2 modules from Artesyn Embedded Technologies provide the performance and features of the NXP® QorIQ® processors on ready-to-go pluggable mezzanine modules that is suitable for use in extended temperature, rugged environments. By incorporating and leveraging the mechanical features and dimensions of the COM Express® specification, the COMX-P40x0-ENP2 modules exhibit all the best attributes of the COM Express open standard enabling shorter development schedules and faster time-to-market. Artesyn has a range of QorIQ based COM Express form factor modules to enable scalable product strategies with multiple performance levels.

The COMX-P40x0-ENP2 modules are 95 mm x125 mm which enable them to fit within a very wide range of enclosures when mounted on a customer carrier. COMX-P40x0-ENP2 modules are off-the-shelf processor solutions that isolate you from the complexities of high speed processor and memory system design, allowing you to concentrate on your carrier and application, lowering risk and improving your development schedules.


By combining the tried and tested Power Architecture processor cores along with a considerable range of on-module I/O, the COMX-P40x0-ENP2 series is suitable for a range of applications including 4G base-station controllers, in flight entertainment, transport control and signaling, vehicle instrumentation and other applications that need high performance, low latency control in a rugged package.



COM Express®

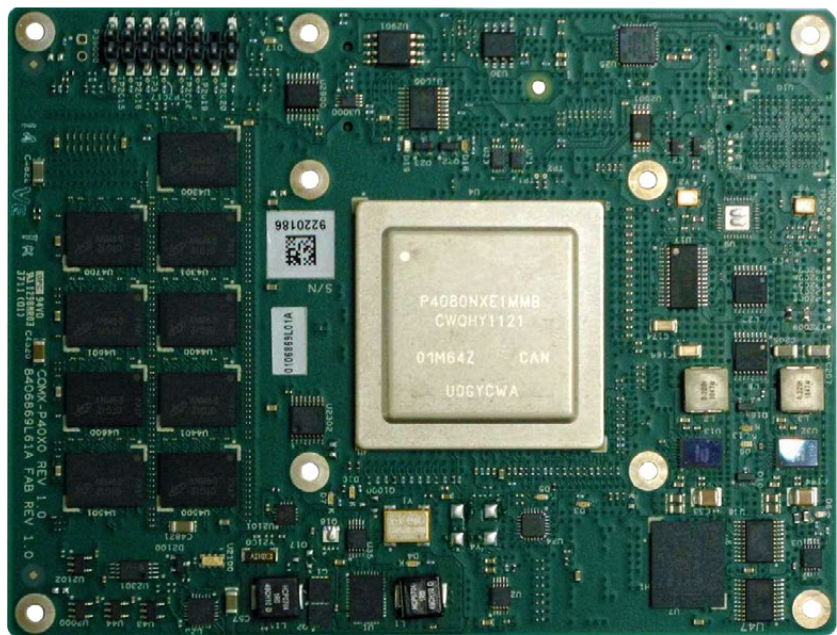

COMX-P4040 & COMX-P4080 Block Diagram

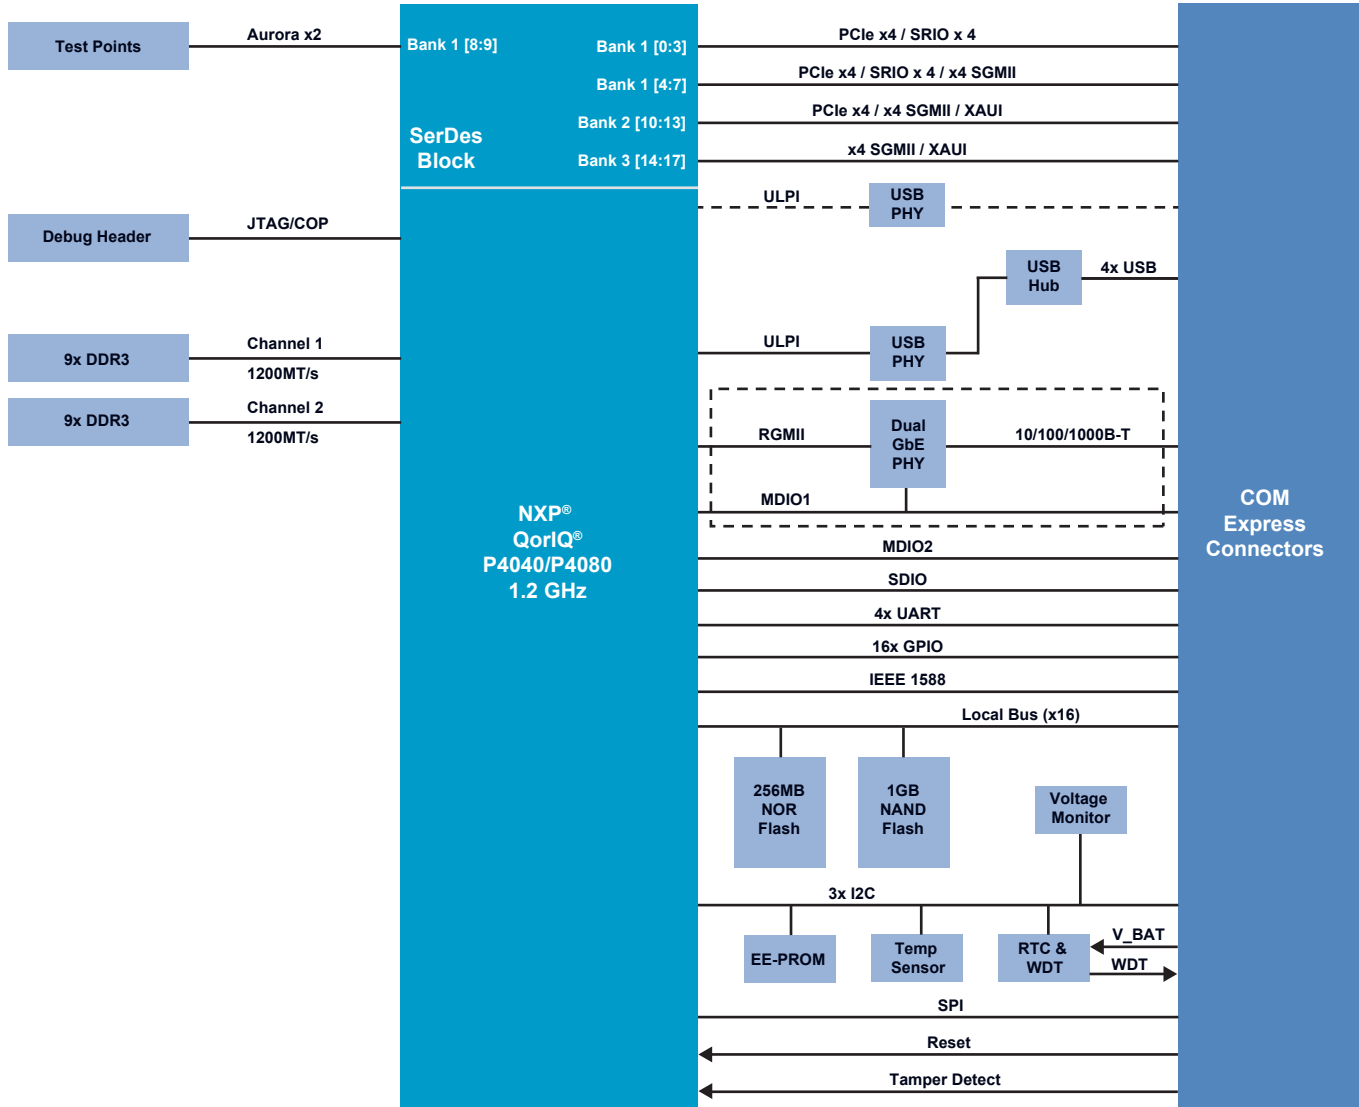

Hardware Specifications

PROCESSOR

- NXP QorIQ P4080, eight cores running at 1.2 GHz
- NXP QorIQ P4040, four cores running at 1.2 GHz

FORM FACTOR

- 95 mm x 125 mm COM Express Basic size module

BOOTLOADER

- U-boot

MEMORY

- 2GB or 4GB soldered-down DDR3-1333 ECC memory

ON-BOARD STORAGE

- 256MB NOR flash
- 1GB NAND flash
- 2kbit I²C user EEPROM

ON-BOARD I/O

- JTAG Debug

I/O TO THE CARRIER

16 configurable SERDES lanes available for maximum flexibility in customer platform design. Available interfaces include:

- Up to two (2) 10 GbE XAU1 – 3.125Gbps
- Up to six (6) 1 GbE SGMII – 1.25Gbps
- Up to two (2) PCI Express x4 – 2.5 or 5Gbps
- Up to two (2) SRIO x4 – 2.5 or 3.125Gbps

OTHER I/O AT THE CONNECTOR

- Four (4) UART ports
- Up to one (1) Gigabit Ethernet interface (10/100/1000Base-T)
- Two (2) MDIO
- Sixteen (16) general purpose I/O (GPIO) ports
- Three (3) I²C bus
- Five (5) IRQ interrupts
- Four (4) or five (5) USB 2.0 ports
- IEEE 1588 control
- Tamper detection
- Real-time clock
- Watchdog timer
- SPI Bus with four (4) chip selects
- 16-bit Enhanced Local Bus
- One (1) SDIO port

ACCESSORIES

- Heatsink, heat spreading plate, development carrier

ENVIRONMENTAL

- -40 °C to +71 °C operating temperature range


VIBRATION

- Sine: 5G (15 to 2000Hz), 10 minutes per axis
- Random: .04g²/Hz (15 to 2000Hz), 1 hour per axis. The profile shall be flat across 15-1000Hz, -6db/octave across 1000Hz - 2000Hz
- Operating shock: 30g for 11ms duration (saw tooth), 3 shocks per axis.

COMPLIANCE AND CERTIFICATION INFORMATION

- RoHS 6/6
- UL/CSA 60950-1, EN55022, FCC Class A

Firmware and Operating System Support

- uBoot
 - Linux 2.6.34 BSP
 - Other BSPs available directly from ecosystem partners including Green Hills, ENEA, Wind River and Mentor Embedded
- 

Ordering Information

<i>Product</i>	<i>Description</i>
COMX-P4040-4G-ENP2	P4040 extended temp module, 4 GB RAM (4x USB + 1x GbE)
COMX-P4080-2G-ENP2	P4080 extended temp module, 2 GB RAM (5x USB, no GbE)
COMX-P4080-4G-E-ENP2	P4080 extended temp module, 4 GB RAM (4x USB + 1x GbE)
COMX-P4000-ENP-HTSNK	COMX-P40x0-ENP2 active heatsink
COMX-CAR-P1	Carrier card for development

SOLUTION SERVICES

Artesyn Embedded Technologies provides a portfolio of solution services optimized to meet your needs throughout the product lifecycle. Design services help speed time-to-market. Deployment services include global 24x7 technical support. Renewal services enable product longevity and technology refresh.

WORLDWIDE OFFICES

United States	+1 888 412 7832	China	+86 400 8888 183
Germany	+49 89 9608 2552	Japan	+81 3 5403 2730
Hong Kong	+852 2176 3540	Korea	+82 2 6004 3268

Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. NXP and QorIQ are trademarks of NXP B.V. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2016 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.



www.artesyn.com