

## ERM Series

20 Watts

### Data Sheet

**Total Power:** 20 Watts  
**Input Voltage:** 12 V, 24 V, 48 V,  
 72 V or 110 V  
**# of Outputs:** Single, Dual

### SPECIAL FEATURES

- Encapsulated
- Wide 4:1 input range
- 1" x 2" DIP package
- 3000 Vac rms I/O isolation
- Single and dual output
- OCP, OVP, OTP Protection
- Remote On/Off
- High efficiency - 88%
- Fire protection meets EN45545-2
- Railway EMC standard EN50121-3-2

### SAFETY

- UL/cUL 62368-1 (60950-1)
- IEC/EN 62368-1 (60950-1)
- IEC/EN 50155 (IEC60571)



### Electrical Specifications

Input	
Input range	9 to 36 Vdc; 18 to 75 Vdc; 40 to 160 Vdc
Efficiency <sup>2</sup>	88% @ 24 Vo
Output	
Voltage tolerance	±1.0%
Line regulation	±0.2%
Load regulation	Single output: ±0.5%; Dual output 1±.0%
Noise/ripple	150 mV
OCP and S/C protection	Hiccup
Overvoltage protection	Latched
Switching frequency	320 KHz
Temperature co-efficient	±0.02 /°C
Isolation	
I/O isolation	3000 Vac rms min.
Insulation resistance	1000 Mohm
Insulation capacitance	1500 pF

### Environmental Specifications


Operating ambient temperature range	-40 °C to +85 °C (with derating)
Storage temperature	-50 °C to +125 °C
Humidity	5% to 95% (non-condensing)

## Ordering Information


Model Number	Input Voltage	Output	Efficiency @ Max Load	Max Power
ERM04A18	9 - 36 V <sub>in</sub>	5 V @ 4 A	87%	20 W
ERM01B18	9 - 36 V <sub>in</sub>	12 V @ 1.67 A	87%	20 W
ERM01C18	9 - 36 V <sub>in</sub>	15 V @ 1.33 A	87%	20 W
ERM01H18	9 - 36 V <sub>in</sub>	24 V @ 0.833 A	87%	20 W
ERM01BB18	9 - 36 V <sub>in</sub>	±12 V @ 0.833 A	86%	20 W
ERM01CC18	9 - 36 V <sub>in</sub>	±15 V @ 0.667 A	86%	20 W
ERM04A36	18 - 75 V <sub>in</sub>	5 V @ 4 A	87%	20 W
ERM01B36	18 - 75 V <sub>in</sub>	12 V @ 1.67 A	88%	20 W
ERM01C36	18 - 75 V <sub>in</sub>	15 V @ 1.33 A	88%	20 W
ERM01H36	18 - 75 V <sub>in</sub>	24 V @ 0.833 A	88%	20 W
ERM01BB36	18 - 75 V <sub>in</sub>	±12 V @ 0.833 A	87%	20 W
ERM01CC36	18 - 75 V <sub>in</sub>	±15 V @ 0.667 A	87%	20 W
ERM04A110	40 - 160 V <sub>in</sub>	5 V @ 4 A	84%	20 W
ERM01B110	40 - 160 V <sub>in</sub>	12 V @ 1.67 A	86%	20 W
ERM01C110	40 - 160 V <sub>in</sub>	15 V @ 1.33 A	86%	20 W
ERM01H110	40 - 160 V <sub>in</sub>	24 V @ 0.833 A	86%	20 W
ERM01BB110	40 - 160 V <sub>in</sub>	±12 V @ 0.833 A	86%	20 W
ERM01CC110	40 - 160 V <sub>in</sub>	±15 V @ 0.667 A	86%	20 W
ERM04A18B	9 - 36 V <sub>in</sub>	5 V @ 4 A	85%	20 W
ERM01B18B	9 - 36 V <sub>in</sub>	12 V @ 1.67 A	87%	20 W
ERM01C18B	9 - 36 V <sub>in</sub>	15 V @ 1.33 A	87%	20 W
ERM01H18B	9 - 36 V <sub>in</sub>	24 V @ 0.833 A	87%	20 W
ERM01BB18B	9 - 36 V <sub>in</sub>	±12 V @ 0.833 A	86%	20 W
ERM01CC18B	9 - 36 V <sub>in</sub>	±15 V @ 0.667 A	86%	20 W
ERM04A36B	18 - 75 V <sub>in</sub>	5 V @ 4 A	85%	20 W
ERM01B36B	18 - 75 V <sub>in</sub>	12 V @ 1.67 A	88%	20 W
ERM01C36B	18 - 75 V <sub>in</sub>	15 V @ 1.33 A	88%	20 W
ERM01H36B	18 - 75 V <sub>in</sub>	24 V @ 0.833 A	88%	20 W
ERM01BB36B	18 - 75 V <sub>in</sub>	±12 V @ 0.833 A	87%	20 W
ERM01CC36B	18 - 75 V <sub>in</sub>	±15 V @ 0.667 A	87%	20 W
ERM04A110B	40 - 160 V <sub>in</sub>	5 V @ 4 A	83%	20 W
ERM01B110B	40 - 160 V <sub>in</sub>	12 V @ 1.67 A	86%	20 W
ERM01C110B	40 - 160 V <sub>in</sub>	15 V @ 1.33 A	86%	20 W
ERM01H110B	40 - 160 V <sub>in</sub>	24 V @ 0.833 A	85%	20 W
ERM01BB110B	40 - 160 V <sub>in</sub>	±12 V @ 0.833 A	86%	20 W
ERM01CC110B	40 - 160 V <sub>in</sub>	±15 V @ 0.667 A	86%	20 W

Mechanical Drawings

ERMxxxxx Models

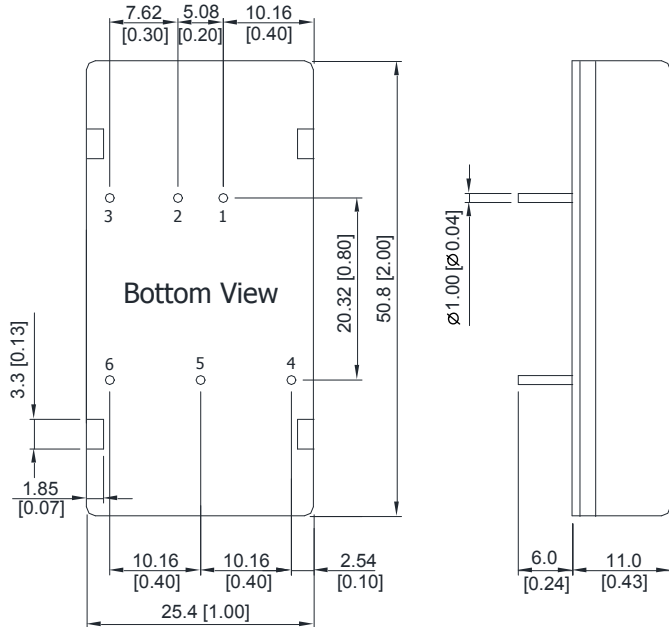

ERMxxxxxB Models

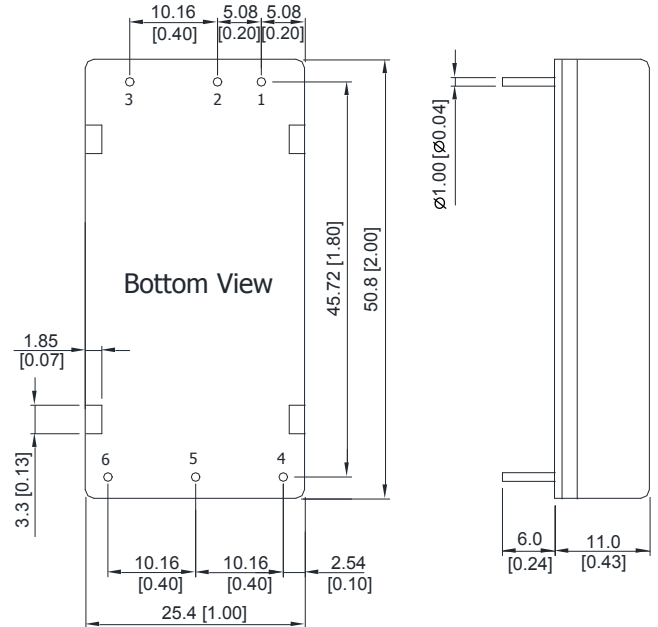

Pin Connectors - ERMxxxxx Models

Pin No.	Single Output	Dual Output
1	+Vin	+Vin
2	-Vin	-Vin
3	Remote On/Off	Remote On/Off
4	+Vout	+Vout
5	Trim	Common
6	-Vout	-Vout

Pin Connectors - ERMxxxxxB Models

Pin No.	Single Output	Dual Output
1	+Vin	+Vin
2	-Vin	-Vin
3	Remote On/Off	Remote On/Off
4	+Vout	+Vout
5	-Vout	Common
6	Trim	-Vout

T: 11.0 mm (0.43 inch) for 24 V Output Models  
 T: 10.2 mm (0.40 inch) for Other Output Models

- All dimensions in mm (inches)
- Tolerance: X.X±0.75 (X.XX±0.03)  
 X.XX±0.25 (X.XXX±0.01)
- Pin diameter  $\varnothing 1.0 \pm 0.05$  (0.04±0.002)


Physical Characteristics

<b>Case Size</b>	50.8 x 25.4 x 11 mm (2.0 x 1.0 x 0.43 inches)
<b>Case Material</b>	Red copper, powder coating
<b>Base Material</b>	FR4 PCB (flammability to UL 94V-0 rated)
<b>Insulated Frame Material</b>	Non-conductive black plastic (flammability to UL 94V-0 rated)
<b>Pin Material</b>	Tinned copper
<b>Potting Material</b>	Epoxy (flammability to UL 94V-0 rated)
<b>Weight</b>	40.5 g


To order the converter with heatsink, please add a suffix -HS (ERM00B110-HS) to order code.

Mechanical Drawings

Heatsink for ERMxxxx Models (Option - HS)

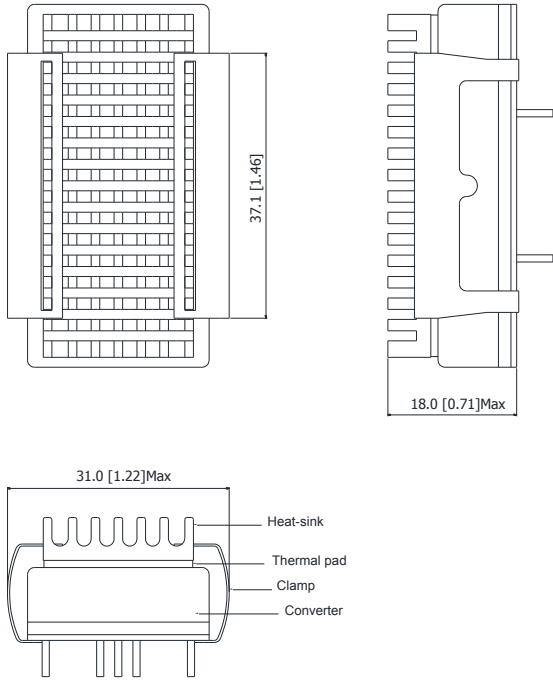

Heatsink for ERMxxxxB Models (Option - HS)

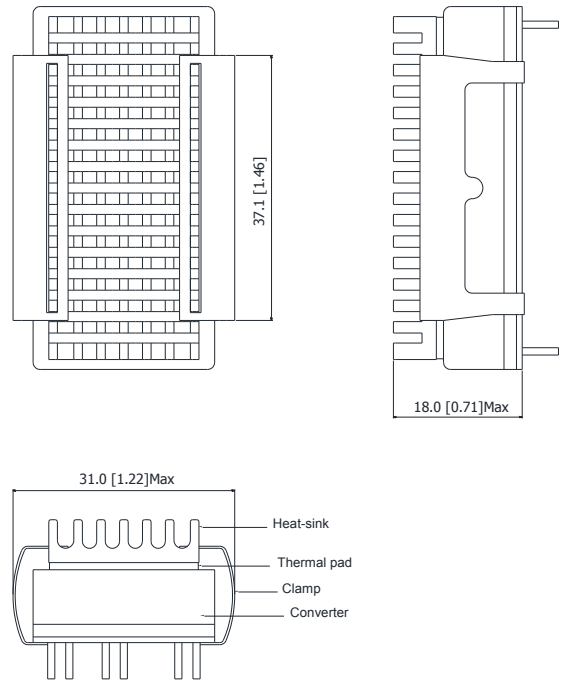

The advantages of adding a heatsink are:

1. To help heat dissipation and increase the stability and reliability of DC/DC converters at high operating temperature atmosphere.
2. To upgrade the operating temperature of DC/DC converters, please refer to Derating Curve.

Physical Characteristics

Heatsink Material	Aluminum
Finish	Black Anodized Coating
Weight	9 g

Notes:

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 3 years
3. Label and logo appearance may vary from what is shown on mechanical drawings.

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way  
 Tempe, AZ 85282  
 USA  
 +1 888 412 7832

Europe (UK)

Waterfront Business Park  
 Merry Hill, Dudley  
 West Midlands, DY5 1LX  
 United Kingdom  
 +44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza  
 2 Wing Yip Street  
 Kwun Tong, Kowloon  
 Hong Kong  
 +852 2176 3333



www.artesyn.com

Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2017 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit [www.artesyn.com/legal](http://www.artesyn.com/legal).

For more information: [www.artesyn.com/power](http://www.artesyn.com/power)  
 For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)