

PCIE-6002 Quick Start Guide

P/N:6806800U71A (June 2017)

1 What's in the box?

Make sure you receive all items of your shipment:

- One PCIE-6002 card.
- Four (4) M2.5 x 4 mm shoulder screws.
- Four (4) M2.5 x 4 mm screws.
- Four (4) 6 mm long (diameter 3 mm) M2.5 hex standoffs.
- One printed copy of *Quick Start Guide* (this document)
- One printed *Safety Notes Summary*
- Any other optional items ordered




When installing or servicing the module or accessories, strictly observe the safety precautions in the *Safety Notes Summary*. Otherwise, personal injury or property damage may occur.

Top View



Side View

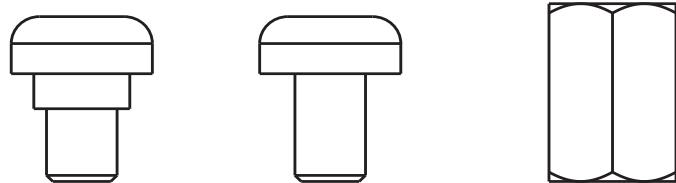

M2.5 shoulder screw

M2.5 screw

Standoff

2 Observe ESD-safe measures

- Use either a properly grounded ESD wrist strap or make sure that you are working in an ESD-safe environment.
- Connect your ESD wrist strap to the ESD connector at the front or the rear of the system.

3 Prepare the installation site

- For information on the environmental and power requirements, see *PCIE-6002 Installation and Use* manual.
- Operating temperatures refer to the temperature of the air circulating around the blade and not to the actual component temperature.

4 Install M.2 AHCI or NVME SSD modules on a PCIE-6002 card

1. Install M2.5 screw and standoff in the PCB hole location based on the length of the M.2 module.
2. Install the M.2 module.
3. Install the M.2 shoulder screw. Torque should not exceed 0.1 Nm. For information, refer to the *PCIE-6002 Installation and Use* manual.

5 Install PCIE-6002 card

1. Turn off the system, including any attached peripherals, and disconnect the system from the electrical outlet and peripheral.
2. Remove the system cover.

5

Install PCIE-6002 card (Contd)

3. Insert the PCIE-6002 card into the selected PCIe slot and ensure the card is properly fitted in the PCIe slot, and then secure the card using a panel screw.

Note 1: For more information about installing a PCIe card in a MaxCore Platform, refer to *MaxCore™ MC3000 Platform Installation and Use* manual or for installing in non-Artсын systems, refer to respective manufacturer's Installation and Use manuals.

Note 2: In case the system may be exposed to temperatures above room temperature while operated, to optimize the airflow to the PCIE-6002 card it is recommended to install slot filler cards. These filler cards need to be installed in any empty PCIe slot to the right (next higher slot number) of a PCIE-6002 card.

4. Close the system cover.

6

Powering the rack

Push the power button on the system's IO Panel or use the system's Board Management Controller (BMC) web interface to power the system remotely.

Finding more information

For more information on the product, see the *PCIE-6002 Installation and Use* and other related documentation.

Go to www.artesyn.com/computing/support/product/technical-documentation.php for technical documentation.

Technical Assistance

To request technical assistance, visit <http://crcportal.artesyn.com/>