

DS2000-3

2000 Watts 12 V Distributed Power System

Data Sheet

Distributed Power Bulk Front-End

Total Output Power: 2000 Watts

+12 Vdc main Output

+3.3 or +5.0Vdc Stand-by Output

Wide Range Input voltage:

90 - 264 Vac

SPECIAL FEATURES

- Active power factor correction
- EN61000-3-2 harmonic compliance
- Active AC inrush control
- 1U X 3U form factor
- 26.14 W / in³
- +12 Vdc output
- +3.3 Vdc or 5.0V Stand-By
- No minimum load required
- Hot plug operation
- N + 1 redundant
- Internal OR'ing fets
- Active current sharing (10 - 100% load)
- Built-in cooling fans (40 mm x 28 mm)
- I²C communication interface bus
- PM Bus compliant
- EERPOM for FRU data
- Green and Amber LED status
- Internal fan speed control
- INTEL, SSI Std. logic timing
- INTEL, SSI Std. FRU data format
- Two year warranty

SAFETY

- UL/cUL 60950 (UL Recognized)
- NEMKO+ CB Report EN60950
- EN60950
- CE Mark
- China CQC



Electrical Specifications

Input	
Input Voltage range:	90 - 264 Vac (wide range) 90 - 264 1200 W load, nominal 100 Vac 180 - 264 2000 W load, nominal 200 Vac
Frequency:	47 - 63 Hz, single phase AC
Inrush Current:	40 A maximum inrush current
Efficiency:	> 89% typical at full load, high line
Conducted EMI:	FCC Subpart J EN55022 Class B
Radiated EMI:	FCC Subpart J EN55022 Class B
Power Factor:	0.99 typical
Leakage Current:	1.40 mA @ 240 Vac
Hold-up time:	10 ms minimum
Output	
Main DC voltage:	+12 V @ 164.2 A 180 - 264 Vac +12 V @ 100 A 90 - 264 Vac
Stand-By	+3.3 Vsb @ 9 A or 5 V @ 6 A
Adjustment range	Factory Set, no pot adjustments
Regulation	+12 Vdc; ±5% +3.3 Vsb/+5.0V; ±5%
Overcurrent	+12 Vdc; latches off if overcurrent lasts over 1 second, otherwise it is auto recovery (See ordering info next page)
Overvoltage	+12 Vdc; 13.2 - 14.4 Vdc +3.3 Vsb; 3.76 - 4.30 Vdc, +5.0Vsb; 5.5 - 6.25Vdc
Undervoltage	+12 Vdc; 9 - 10.8 V (latch off)
Turn-on delay	2 second max
+12 V Output Rise Time	5 - 300 ms, Monotonic Rise

Logic Control	
PRESENT#	TTL logic LOW if power supply is seated into system connector. This is a short pin. A logic HIGH if the PSU is removed.
PWOK#	Active TTL LOW when output is within regulation limits.
AC OK#	A LOW logic level if the input voltage is within allowable limits. A TTL logic HIGH level, and a 2 mS early warning signal before 12.0 V DC output loss of regulation.


Environmental Specifications	
Operating temperature:	-10 °C to 50 °C
Storage temperature:	-40 °C to +85 °C Altitude, operating 10,000 ft
Electromagnetic susceptibility / Input transients:	-EN61000-3-2, -3-3 -EN61000-4-2, 4.3, 4-4, -4-5, 4-11 Level -EN55024:1998
RoHS & lead-free compliant (no tantalum caps)	
Humidity:	20 to 90% RH, non-condensing
Shock and vibration:	Standard operating and non-operaitng random shock and vibration
MTBF (Demonstrated):	300 K Hrs at full load, 40 °C

Ordering Information								
Model Number	Nominal Output Voltage Set Point	Set Point Tolerance	Total Regulation	Minimum Current	Maximum Current	Output Ripple P/P	Overcurrent	Airflow
DS2000-3	12.2 Vdc 3.3 Vsb	±0.2% ±1%	±5% ±5%	0 A 0 A	161.5 A 9.0 A	120 mV 60 mV	120 - 130% of nominal 100 - 125% of nominal	Standard
DS2000-3-001	12.2 Vdc 3.3 Vsb	±0.2% ±1%	±5% ±5%	0 A 0 A	161.5 A** 9.0 A	120 mV 60 mV	120 - 130% of nominal 100 - 125% of nominal	Reverse
DS2000-3-002	12.2 Vdc 5.0 Vsb	±0.2% ±1%	±5% ±5%	0 A 0 A	161.5 A 6.0 A	120 mV 60 mV	120 - 130% of nominal 120 - 140% of nominal	Standard

* Overcurrent latches off if overcurrent lasts over 1 second, otherwise it is auto recovery.


** Derates per below curve (-001) reverse air

DS2000-3-001 Derating Curve

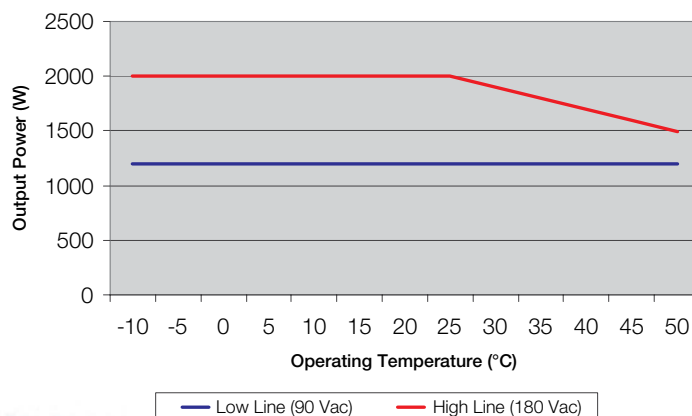

Mechanical Drawing

Power Supply Condition	Power LED (Green)	Fail LED (Amber)
No AC power to PSU	OFF	OFF
AC Present/Standby Output ON	Blinking	OFF
Power Supply Main Output ON and OK	ON	OFF
Power Supply Main Output Failure (over-voltage and over-temperature)	OFF	ON
Over-current	ON	Blinking

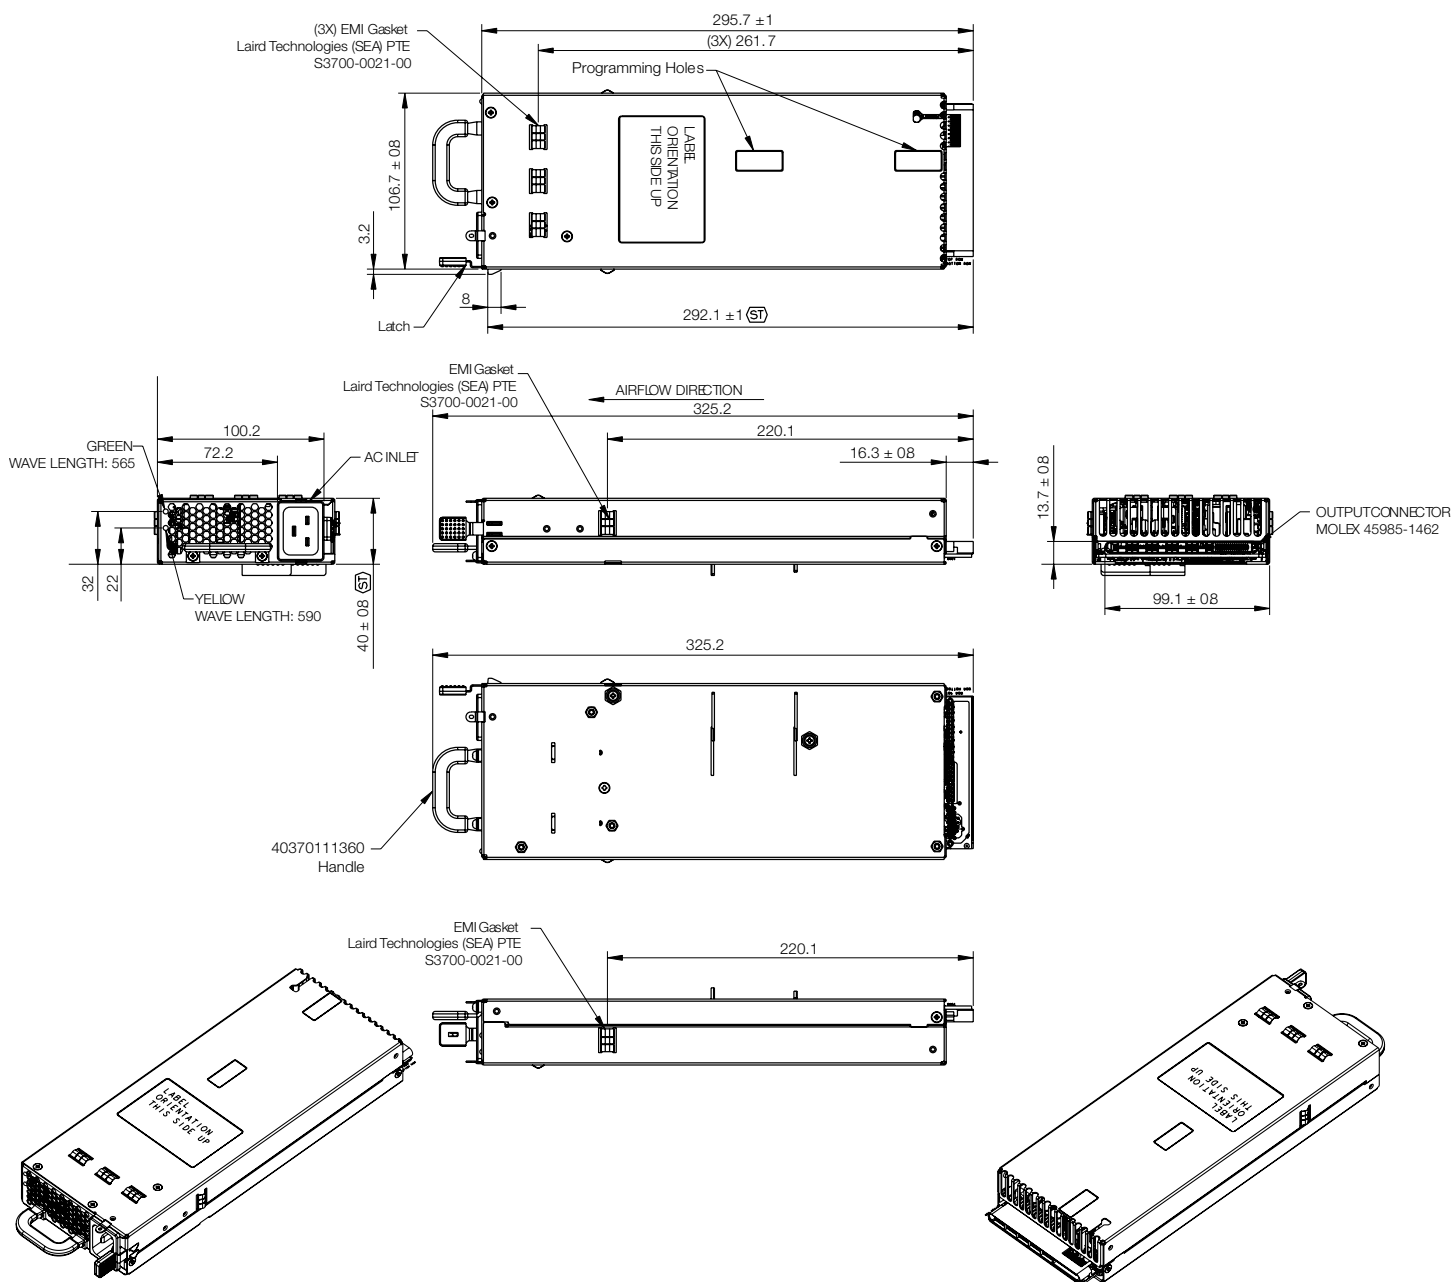

DC Output Connector Pinout/Functions

Unit Connector; Molex Blade, (LPH Series) 45985-xxx

Mating Connector; Molex Blade, (LPH Series) SD-45984-1462 or any approved equivalent


Signal Descriptions

Signal Pin #Comp Side Top Row	Signal Function	Signal Description	Signal Pin #Solder Side Bottom Row	Signal Function	Signal Description
A17	3.3 V Sense RTN	3.3 V Sen Rtn	A1	SPARE	
A18	AC OK#	AC input present	A2	SPARE	+Stand-by rmt Sen
A19	A0	I ² C address bit 0	A3	#ALERT	Fail signal
A20	A2	I ² C address bit 2	A4	A1	I ² C address bit 1
A21	SCL*	I ² C Clock signal	A5	SDA	I ² C Data signal
A22	PWOK#	Pwr OK output	A6	PRESENT#	Power supply present
A23	12 LS	12 V load share bus	A7	PSON#	Power enable input
A24	+12 VRS Rtn	+12 V Rmt Sen Rtn	A8	+12 V RS	+12 V Remote Sense
A25	3.3 vsb	Stand-By	A9	3.3 vsb	Stand-By
A26	3.3 vsb	Stand-By	A10	3.3 vsb	Stand-By
A27	3.3 vsb	Stand-By	A11	3.3 vsb	Stand-By
A28	3.3 vsb	Stand-By	A12	3.3 vsb	Stand-By
A29	3.3 vsb Rtn	Stand-By return	A13	3.3 vsb Rtn	Stand-By return
A30	3.3 vsb Rtn	Stand-By return	A14	3.3 vsb Rtn	Stand-By return
A31	3.3 vsb Rtn	Stand-By return	A15	3.3 vsb Rtn	Stand-By return
A32	3.3 vsb Rtn	Stand-By return	A16	3.3 vsb Rtn	Stand-By return



Power Blade			Power Blade		
PB1 Top	+12 vdc	Main Output	PB1 Bottom	+12 vdc	Main Output
PB2 Top	+12 vdc	Main Output	PB2 Bottom	+12 vdc	Main Output
PB3 Top	+12 vdc	Main Output	PB3 Bottom	+12 vdc Rtn	Main Output
PB4 Top	+12 vdc Rtn	Main Output	PB4 Bottom	+12 vdc Rtn	Main Output
PB5 Top	+12 vdc Rtn	Main Output	PB5 Bottom	+12 vdc Rtn	Main Output

* Supports I²C standard mode (100 kHz) only

Mating Connector - Molex p/n: 45984-1462



Signal Pin A1 Bottom Left
Signal Pin A17 Top Left

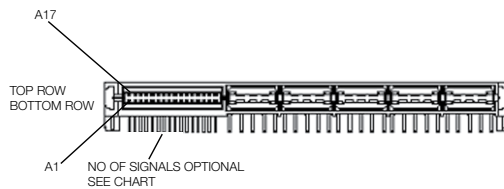

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
Tempe, AZ 85282
USA
+1 888 412 7832

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333



www.artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2014 Artesyn Embedded Technologies, Inc.

For more information: www.artesyn.com/power
For support: productsupport.ep@artesyn.com