

MVME8105

NXP® QorIQ® P5020 VME64x SBC

Data Sheet

- NXP QorIQ P5020 2.0 GHz
- 4GB DDR3-1333 MHz ECC memory soldered down
- 512KB MRAM
- Two PMC/XMC sites
- Embedded NAND Flash (8GB eMMC)
- Up to two USB 2.0 ports
- Up to three Ethernet ports (two ports on front panel)
- Up to five Serial ports
- Two GPIO
- BSP support including Wind River VxWorks, Linux and Green Hills Integrity


The Artesyn Embedded Technologies MVME8105 is a high performance 6U VME SBC featuring the NXP QorIQ P5020 2.0 GHz processor supporting high speed DDR3-1333 MHz with ECC. It offers expanded IO and memory features with multiple USB, Serial and Ethernet ports. Memory includes up to 4GB DDR3, 512KB MRAM non-volatile memory, and 8GB eMMC NAND Flash.

The MVME8105 provides an expansion to Artesyn's VMEbus product family to prolong current programs while providing more computing performance and data throughput. Compared to other variants of the MVME8100 series, the MVME8105 is designed to match the highest computing power with an elimination of the VXS interface. In addition, it increases the number of Gigabit Ethernet ports to two (2) on the front panel, which is suitable for applications requiring higher Ethernet connection capacities.

Supporting a full range of BSPs including Wind River VxWorks, Linux and Green Hills Integrity, the MVME8105 is suitable for a range of high end industrial control such as SPE and photo lithography, and C4ISR (including Radar/Sonar) and it is also an ideal SBC solution for the high performance mission/safety critical applications.



MVME8105 Block Diagram

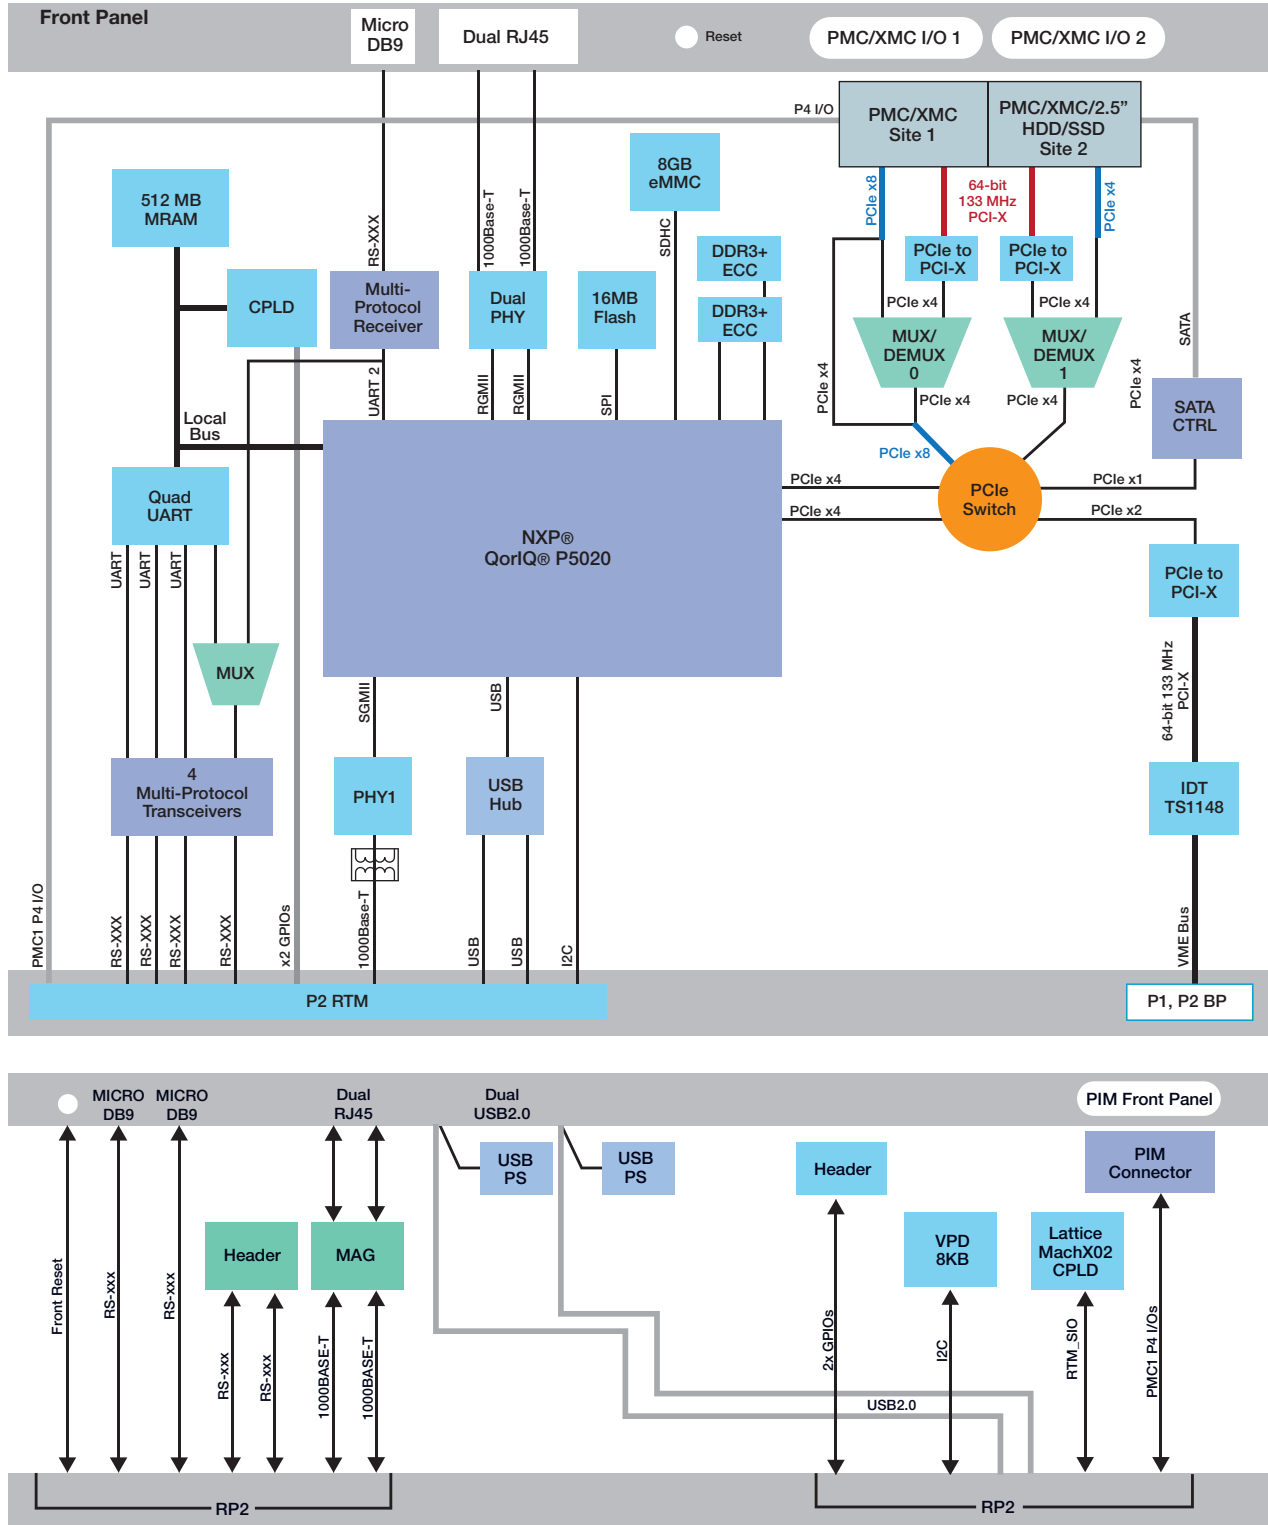

Hardware Specifications

PROCESSOR

- NXP QorIQ P5020
- 2.0 GHz: ENP1 variants (28 W)

MEMORY

- Designed for 4GB of 64-bit DDR3-1333 ECC SDRAM soldered down
- 16MB SPI ROM for boot code (in 1+1 redundant 8MB banks/devices)
- 512KB MRAM for data storage
- 8GB NAND Flash with eMMC interface

BACKPLANE I/O

- P1
 - VME64x & 2eSST
- P2
 - VME64x & 2eSST
 - PMC1 I/O (64 signals)
 - Two USB 2.0
 - VME64x & 2eSST
 - Four RS232/422/485
 - One 10/100/1000BaseT Ethernet
 - Two GPIO

OTHER FEATURES

- Real Time Clock with battery backup
- Real time counters
- Watchdog

EXPANSION MODULE

- Site 1 supports PMC or XMC (PCI-X/PCIe x8)
- Site 2 supports PMC or XMC (PCI-X/PCIe x4) or alternatively supports a mounting kit for a 2.5" SATA HDD or SSD

FRONT PANEL CONNECTIVITY

- Two Gigabit Ethernet (RJ-45)
- One RS232/422/485 console (Micro-DB9)
- Two PMC/XMC

REAR TRANSITION MODULE

- MVME8110-RTM (or VXS1-RTM1)
 - Two USB 2.0 ports (Type A)
 - Two RS232/422/485 ports (Micro-DB9)
 - One port is switchable between a console and standard COM port
 - Two RS232/422/485 ports (internal headers)
 - Two 10/100/1000BASE-T Ethernet ports (RJ-45)
 - One PMC Interface Module (PIM) site
 - Two GPIO (internal headers)
 - Reset switch

POWER REQUIREMENTS

- ENP1: 38 W idle, 42 W typical, 54 W max

Software and Firmware Specifications

BOOT

- UBoot binary and source code

BOARD SUPPORT PACKAGES

- Wind River VxWorks
- Linux
- Green Hill Integrity (upon customer request)

Estimated MTBF

MTBF estimated per Telcordia SR-332, issue 2, ground fixed, controlled environment, unit ambient air temperature of 40 °C is 600,000 hours at 60% confidence level. Contact Artesyn for alternative environments or temperatures.

All Modules

ENVIRONMENTAL

Ruggedization Level	ENP1
Cooling Method	Forced Air
Operating Temperature	0 °C to +55 °C
Storage Temperature	-40 °C to +85 °C
Vibration Sine: (10min/axis)	2G, 5 - 500 Hz
Vibration Random: (1hr/axis)	.002 g ² /Hz, 15 to 2000 Hz ¹
Shock	20 g/11 mS
Humidity	to 95% RH
Conformal Coating	No

Note 1: Flat 15-1000 Hz, -6 db/octave 1000 Hz – 2000 Hz [MIL-STD 810F Figure 514.5C-17]

ELECTROMAGNETIC COMPATIBILITY (EMC)

- Artesyn board products are tested in a representative system to the following standards:
 - U.S.: FCC Part 15, Subpart B, Class A (non-residential)
 - Canada: ICES-003, Class A (non-residential)
 - CE Mark per European EMC Directive 2004/108/EC with Amendments; Emissions: EN55022 Class A; Immunity: EN55024
 - KCC Mark (in process)

DOCUMENTATION

- Installation and Use Manuals
- Programmers Reference Manual
- Release Notes
- OS Release Notes and User Guide

Ordering Information

Part Number	Description
Boards	
MVME8105-01E	P5020 2.0 GHz, 4GB DDR3, 2PMC/XMC, ENP1, IEEE
Rear Transition Modules	
MVME8110-RTM	RTM FOR MVME8100/8105/8110, without P0, IEEE
Accessories	
MVME8100-HDMTKIT4	MVME8100/8105/8110 hard drive mounting kit for ENP1 & ENP4
SERIAL-MINI-D2	Serial cable - Micro D sub connector to standard DB-9
ACC/CABLE/SER/DTE/6E	Serial cable, RD 009, 2M, 2 DTE MD/D, RJ45 to DB9

SOLUTION SERVICES

Artesyn Embedded Technologies provides a portfolio of solution services optimized to meet your needs throughout the product lifecycle. Design services help speed time-to-market. Deployment services include global 24x7 technical support. Renewal services enable product longevity and technology refresh.

WORLDWIDE OFFICES

United States	+1 888 412 7832	China	+86 400 8888 183
Hong Kong	+852 2176 3540	Korea	+82 2 6004 3268

Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. NXP and QorIQ are trademarks of NXP B.V. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2018 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.



www.artesyn.com

MVME8105-DS 20Dec2018