


Description

The AGH360-48S12B-6L is a single output DC/DC converter with standard half-brick outline and pin configuration. It delivers up to 30A output current with 12V output voltage. Above 95.5% ultra-high efficiency and excellent thermal performance make it an ideal choice to supply power in telecom and datacom. It can work under -40°C ~ +85°C.

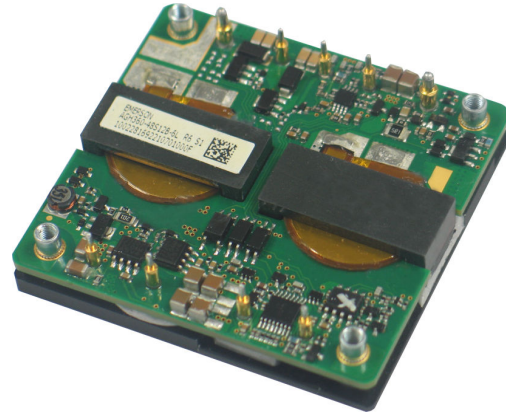

- Output short circuit protection
- Output over-voltage protection
- Over-temperature protection

Operational Features

- Delivers up to 30A output current
- Ultra-high efficiency 95.5% typ. at half load
- Wide input range: 36V ~ 75V
- Excellent thermal performance
- No minimum load requirement
- Basic isolation
- High power density
- Low output noise
- RoHS 6 compliant

Mechanical Features

- Industry standard half-brick pin-out outline
- With baseplate
- Pin length option: 3.8mm, 4.8mm, 5.8mm

Control Features

- Remote control function (negative logic)
- Remote output sense
- Trim function: 90% ~ 110%

Safety & EMC

- Meets basic insulation requirements of IEC/EN/UL/CSA 60950
- UL/CSA 60950 recognized and certified to IEC/EN 60950
- Meets the Low Voltage Directives 2006/95/EEC with the Amendment Directive 93/68/EEC which facilitates CE marking in user's end product
- Approved by UL and TUV
- Materials meet UL94, V-0 flammability rating
- Meets conducted emission's requirements of EN55022 Class B with external filter.

Protection Features

- Input under-voltage lockout
- Output over-current protection

Electrical Characteristics

Full operating ambient temperature range is -40°C to +85°C.

Specifications are subject to change without notice.

Parameter		Min.	Typ.	Max.	Unit	Notes & conditions
Absolute max. ratings						
Input voltage	Non-operating			100	V	100ms
	Operating			80	V	Continuous
Operating temperature		-40		+85	°C	
Storage temperature		-55		+125	°C	
Voltage at remote ON/OFF pin		-0.7		+12	V	
Input characteristics						
Operating input voltage range		36	48	75	V	
Input under-voltage lockout	Turn-on voltage threshold		35	36	V	
	Turn-off voltage threshold	32	34		V	
	Lockout voltage hysteresis	1		3	V	
Max. input current				13	A	36V _{in} , full load
No-load input current			0.1		A	
Standby input current			0.01		A	Remote OFF
Input reflected ripple current				100	mA	Through 12μH inductor; Figure 15
Recommended input fuse				15	A	External fast blow fuse is recommended; Figure 11
Input filter component values (C/L)			8.8\1.8		μF\μH	Internal values
Recommended external input capacitance		220			μF	Low ESR capacitor is recommended; Figure 11
Output characteristics						
Output voltage set point (standard option)		11.8	12	12.2	V	48V _{in} , half load
Output voltage line regulation				0.2	%	
				24	mV	
Output voltage load regulation				0.2	%	
				24	mV	
Output voltage temperature regulation				0.02	%/°C	

Parameter		Min.	Typ.	Max.	Unit	Notes & conditions
Total output voltage range		11.7	12	12.3	V	Over sample, line, load, temperature & life
Output voltage ripple and noise				120	mVpp	Figure 2 20MHz bandwidth; Figure 15
Operating output current range		0		30	A	
Output DC current-limit inception		31.5		39	A	Hiccup: auto-restart when over-current condition is removed
Output capacitance		470	1000	10000	μF	High frequency and low ESR are recommended
Dynamic characteristics						
Dynamic response	50% ~ 75% ~ 50% $I_{o,max}$, 0.1A/μs			600	mV	Figure 4 Test condition: 25°C, nominal input voltage, Figure 11
	Settling time			700	μs	Recovery to within 1% $V_{o,nom}$
	50% ~ 75% ~ 50% $I_{o,max}$, 1A/μs			1200	mV	Figure 5 Test condition: 25°C, nominal input voltage, Figure 11
	Settling time			700	μs	Recovery to within 1% $V_{o,nom}$
Turn-on transient	Rise time			100	ms	Full load, Figure 6
	Turn-on delay time			150	ms	
	Output voltage overshoot			5	% V_o	
Efficiency						
100% load			94.5		%	Figure 1
50% load			95.5		%	Figure 1

Electrical Characteristics (Continued)

Parameter	Min.	Typ.	Max.	Unit	Notes & conditions	
Isolation characteristics						
Isolation voltage (conditions: 1mA for 60s, slew rate of 1500V/10s)	1500			V	Basic insulation, pollution degree 2, input to output	
	1500			V	Basic insulation, pollution degree 2, input to baseplate	
	500			V	Functional insulation, pollution degree 2, output to baseplate	
Feature characteristics						
Switching frequency	135	145	155	kHz		
Remote ON/OFF control (positive logic)	Off-state voltage	-0.7		1.2	V	Figure 12
	On-state voltage	3.5		12	V	
Remote ON/OFF control (negative logic)	Off-state voltage	3.5		12	V	
	On-state voltage	-0.7		1.2	V	
Output voltage trim range	10.8		13.2	V	See <i>Trim Characteristics</i> of <i>Application Note</i>	
Output voltage remote sense range			0.6	V		
Output over-voltage protection	115	125	140	%Vo,nom	Hiccup: auto-restart when over-voltage condition is removed	
Over-temperature shutdown		118		°C	Auto recovery; over-temperature protect (OTP) test point: Figure 10	
Over-temperature hysteresis				°C		
Reliability characteristics						
Calculated MTBF (telcordia)		1.5		10 ⁶ h	Telcordia SR-332-2006; 80% load, 300LFM, 40°C T _a	

Electromagnetic Compatibility Requirements

Test Item	Regulations	Criteria	Notes & conditions
Conducted emission	EN 55022 DC input port, class B limits		See EMC test conditions
Immunity to electrostatic discharge	IEC/EN61000-4-2 Enclosure port, level 3	B	
Immunity to electrical fast transient	IEC/EN61000-4-4 DC input port, level 3	B	
Immunity to surges	IEC/EN61000-4-5 DC input port Line to ground(earth): 600V Line to line: 600V	B	
Immunity to continuous conducted interference	IEC/EN61000-4-6 DC input port, level 2	A	
Immunity to voltage dips and short interruptions and voltage variations	EN 61000-4-29 DC input port	B	

Criterion A: Normal performance during and after test.

Criterion B: For EFT and surges, low-voltage protection or reset is not allowed. Temporary output voltage fluctuation ceases after disturbances ceases, and from which the EUT recovers its normal performance automatically.

For Dips and ESD, output voltage fluctuation or reset is allowed during the test, but recovers to its normal performance automatically after the disturbance ceases.

Criterion C: Temporary loss of output, the correction of which requires operator intervention.

Criterion D: Loss of output which is not recoverable, owing to damage to hardware.

Qualification Testing

Parameter	Unit (pcs)	Test condition
Halt test	4 ~ 5	$T_{a,min}-10^{\circ}\text{C}$ to $T_{a,max}+10^{\circ}\text{C}$, 5°C step, V_{in} = min to max, 0 ~ 105% load
Vibration	3	Frequency range: 5Hz ~ 20Hz, 20Hz ~ 200Hz, A.S.D: $1.0\text{m}^2/\text{s}^3$, -3db/oct, axes of vibration: X/Y/Z Time: 30min/axes
Mechanical shock	3	30g, 6ms, 3axes, 6directions, 3time/direction
Thermal shock	3	-40°C to 100°C , unit temperature 20cycles
Thermal cycling	3	-40°C to 55°C , temperature change rate: $1^{\circ}\text{C}/\text{min}$, cycles: 2cycles
Humidity	3	40°C , 95%RH, 48h

Parameter	Unit (pcs)	Test condition
Solder ability	15	IPC J-STD-002C-2007

Characteristic Curves

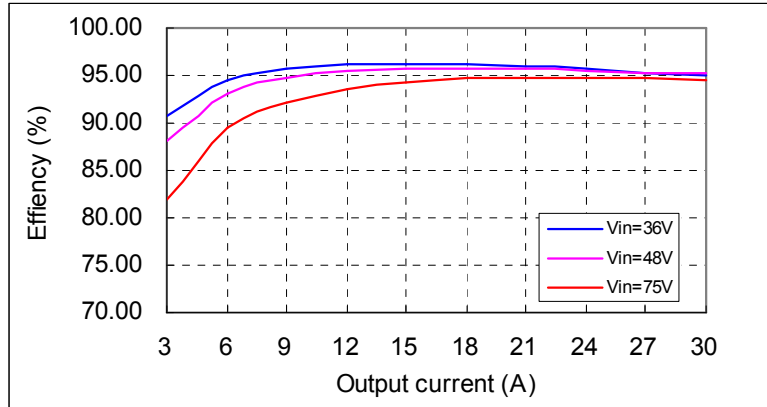


Figure 1 Efficiency vs. output current, $T_a=25^{\circ}\text{C}$, 400LFM, $V_o=12\text{V}$

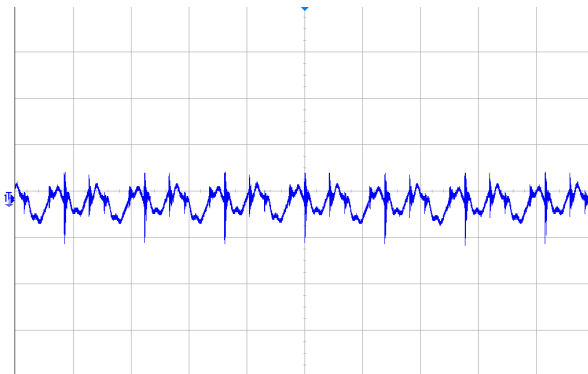


Figure 2 Output ripple & noise (5 $\mu\text{s}/\text{div}$, 20mV/div), see Figure 15 for test configuration

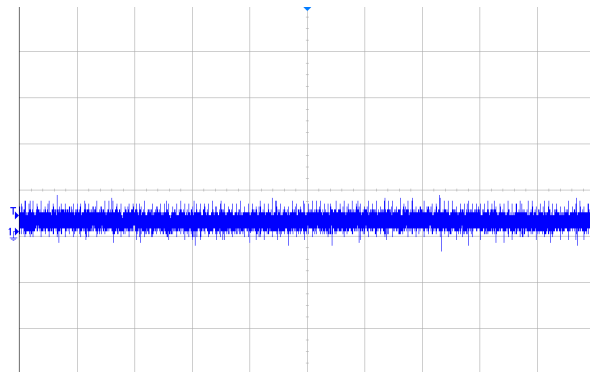


Figure 3 Input reflected ripple current (50 $\mu\text{s}/\text{div}$, 50mA/div), see Figure 15 for test configuration

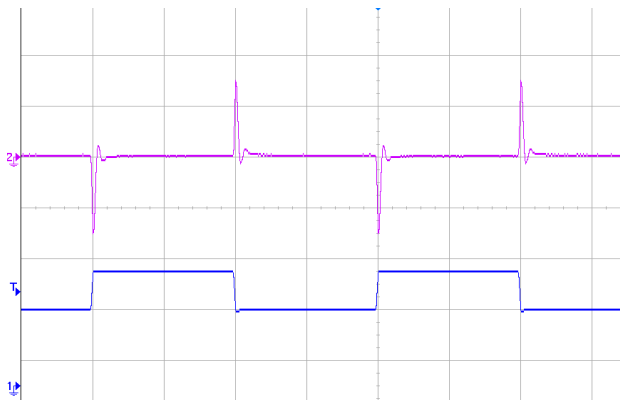


Figure 4 Dynamic response for 25% load step (50% ~ 75% ~ 50%) and 0.1A/ μs slew rate, (2ms/div), see Figure 11 for test configuration; CH1-output current (10A/div); CH2-output voltage (200mV/div)

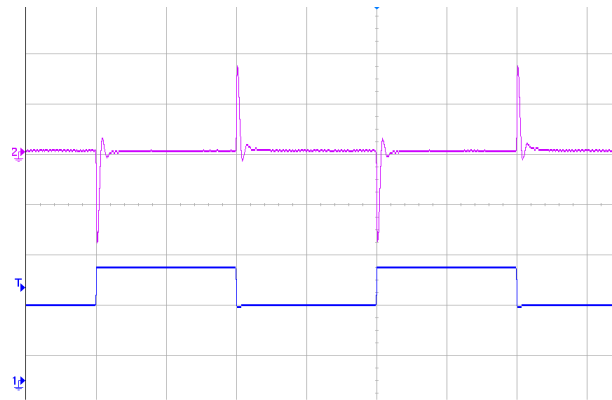


Figure 5 Dynamic response for 25% load step (50% ~ 75% ~ 50%) and 1A/ μs slew rate, (2ms/div), see Figure 11 for test configuration; CH1-output current (10A/div); CH2-output voltage (200mV/div)

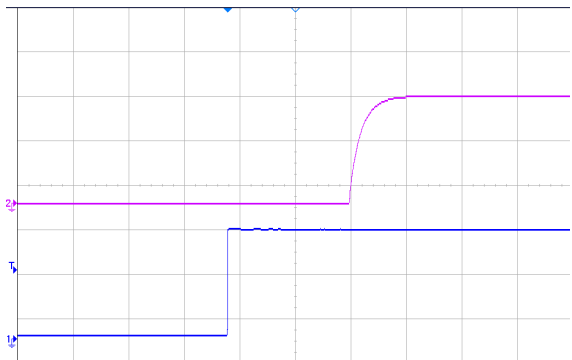


Figure 6 Output voltage startup by power on, (50ms/div), see Figure 11 for test configuration; CH1-input voltage (20V/div); CH2-output voltage (5V/div)

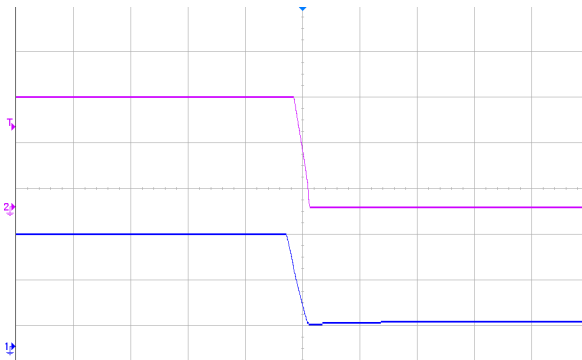


Figure 7 Output voltage shut down by power off, (5ms/div), see Figure 11 for test configuration; CH1-input voltage (20V/div); CH2-output voltage (5V/div)

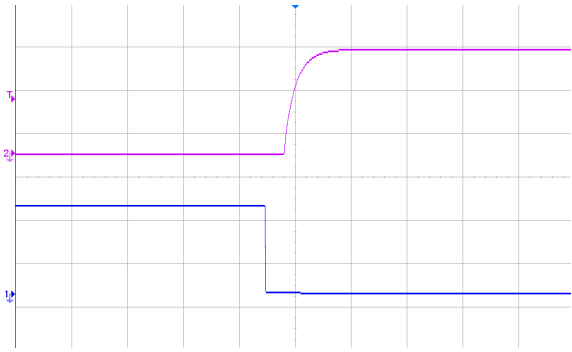


Figure 8 Output voltage startup by remote ON, (50ms/div), see Figure 11 for test configuration; CH1-remote ON (2V/div); CH2-output voltage (5V/div)

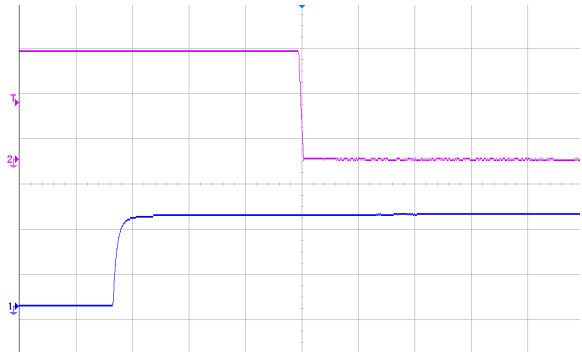


Figure 9 Output voltage shutdown by remote OFF, (5ms/div), see Figure 11 for test configuration; CH1-remote ON (2V/div); CH2-output voltage (5V/div)

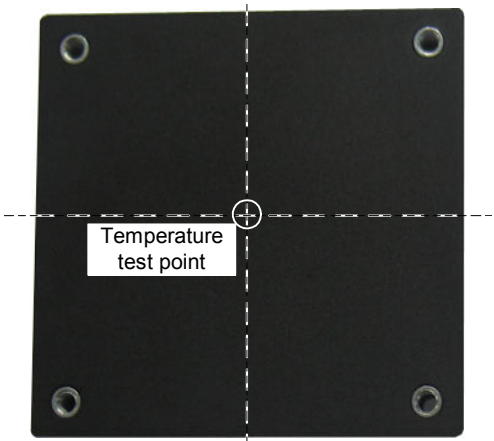


Figure 10 OTP test point

Application Note

Typical Application

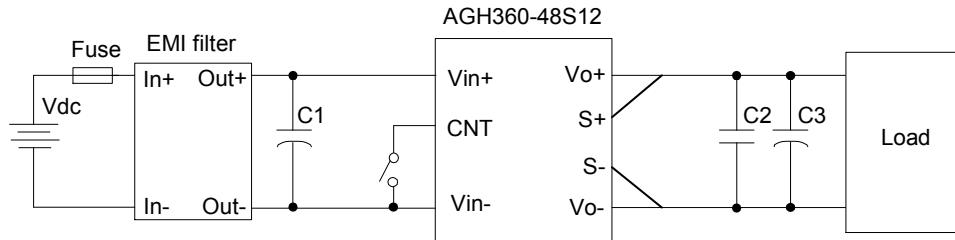


Figure 11 Typical application

C1: 220 μ F/100V electrolytic capacitor, P/N: UPM2A221MHD (Nichicon) or equivalent caps

C2:1 μ F/100V X7R ceramic capacitor, P/N: C3225X7R2A105KT0L0U (TDK) or equivalent caps

C3:1000 μ F electrolytic capacitor, P/N: UPM1A102MHD (Nichicon) or equivalent caps

Fuse: External fast blow fuse with a rating of 15A. The recommended fuse model is 216015.P from LITTLEFUSE.

Remote ON/OFF

Negative remote ON/OFF logic is available in AGH360-48S12. The logic is CMOS and TTL compatible.

The voltage between pin Remote ON/OFF and pin Vin- must not exceed the range listed in Table “Feature characteristics” to ensure proper operation. The external remote ON/OFF circuit is highly recommended as shown in Figure 12.

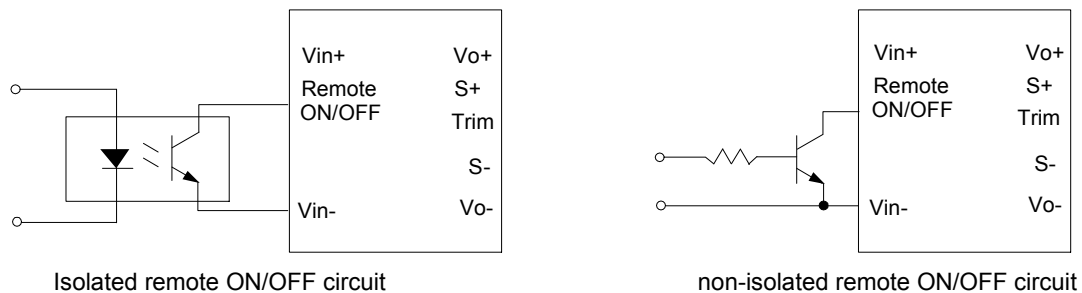


Figure 12 External remote ON/OFF circuit

Trim Characteristics

Connecting an external resistor between Trim pin and Vo- pin will decrease the output voltage, while connecting it between Trim and Vo+ will increase the output voltage. The following equations determine the external resistance to obtain the trimmed output voltage.

$$R_{adj_down} = \left(\frac{100\%}{\Delta\%} - 2 \right) k\Omega$$

$$R_{adj_up} = \left(\frac{V_{norm} (100\% + \Delta\%)}{1.225 \times \Delta\%} - \frac{100\% + 2 \times \Delta\%}{\Delta\%} \right) k\Omega$$

$$\Delta\% = \left| \frac{V_{nominal} - V_{desired}}{V_{nominal}} \right| \times 100$$

$\Delta\%$: Output e rate against nominal output voltage.

$V_{nominal}$: Nominal output voltage.

For example, to get 13.2V output, the trimming resistor is

$$R_{adj_up} = \left(\frac{12(100\% + 10\%)}{1.225 \times 10\%} - \frac{100\% + 2 \times 10\%}{10\%} \right) = 95.76k\Omega$$

When trimming up, the output current should be decreased accordingly so as not to exceed the maximum output power and the minimum input voltage should be increased as shown in below figures.

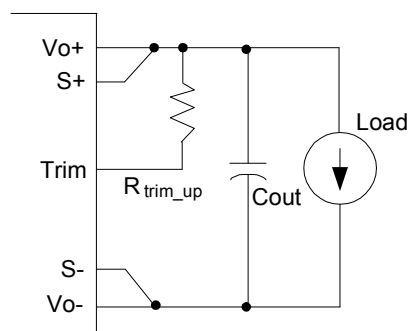


Figure 13 Trim up

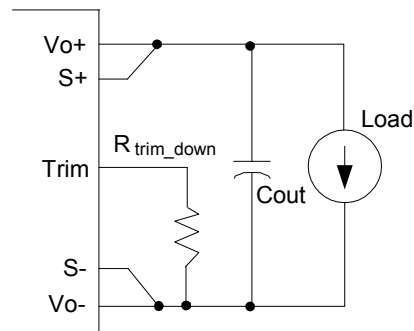


Figure 14 Trim down

Sense Characteristics

If the load is far from the unit, connect S+ and S- to the terminal of the load respectively to compensate the voltage drop on the transmission line. See Figure 11.

If the sense compensate function is not necessary, connect S+ to Vo+ and S- to Vo- directly.

Input Ripple & Inrush Current And Output Ripple & Noise Test Configuration

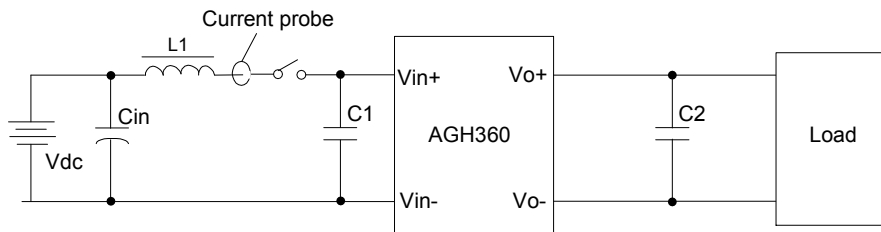


Figure 15 Input ripple & inrush current, ripple & noise test configuration

Vdc: DC power supply

L1: 12μH

Cin: 220μF/100V typical

C1: Input electrolytic capacitor, according to the same type as C1 in Figure 11

C2: Output electrolytic capacitor, according to the same type as C3 in Figure 11

Note: It is recommended to use a coaxial cable with series 50Ω resistor and 0.68μF ceramic capacitor or a ground ring of probe to test output ripple & noise.

EMC Test Conditions

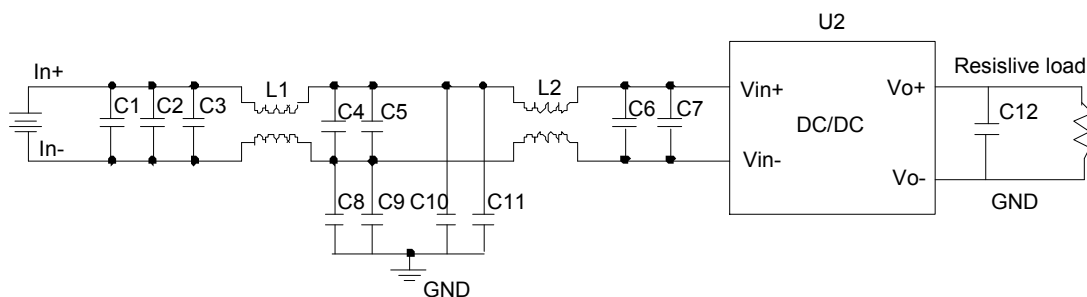


Figure 16 EMC test configuration

C1~C5: SMD ceramic capacitor -100V-1000nF-X7R-1210

C6: SMD ceramic capacitor -100V-100nF-±10%-X7R-1206

L1, L2: Common mode inductor - single phase -473uH-±25%-14A magnetic ring 1*25.4*12.7mm - working temperature range includes module temperature rise. Temperature rise at rated current: 55°C max

C8~C11: High-voltage chip ceramic capacitor. Capacitance: 0.1U/630V/X7R. Size: 2220. Capable of withstanding 1kV voltage

C7: Input electrolytic capacitor, according to the same type as C1 in Figure 11


C12: Output electrolytic capacitor, according to the same type as C3 in Figure 11

U2: Module to test, AGH360-48S12

PE: Be connected to Vo-

Thermal Considerations

The converter is designed to operate in different thermal environments and sufficient cooling must be provided. Proper cooling of the DC/DC converter can be verified by measuring the temperatures at the test points shown in Figure 17. The temperatures at these test points should not exceed the maximum values in Table 1.

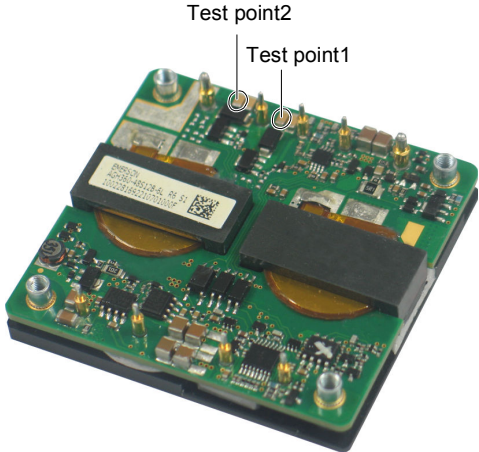

Temperature test point on FR-4 board

Figure 17 Temperature test points

Table 1 Temperature limit of the test points

Test point	Temperature limit
Test point 1	118°C
Test point 2	118°C

The converter can operate with a smaller heatsink and sufficient airflow. Figure 18 shows the derating output current vs. ambient air temperature at different air velocity with a specified heatsink.


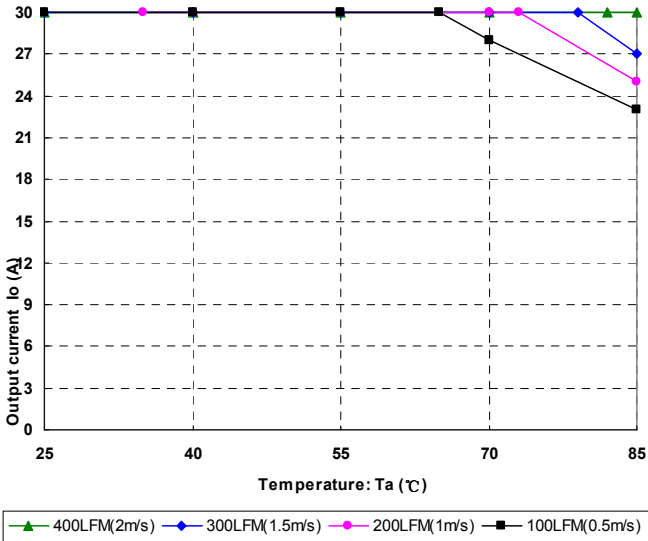


Figure 18 Output power derating, 48Vin, air flowing across the converter from pin 1 to pin 4

Mechanical Diagram

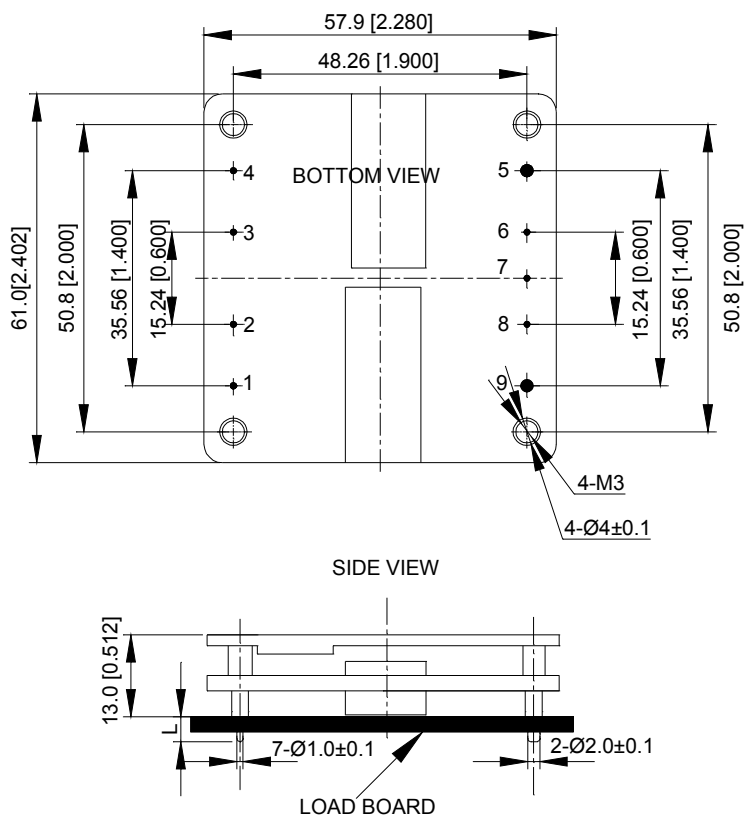

UNIT: mm[inch] BOTTOM VIEW: pin on upside
 TOLERANCE: X.Xmm±0.5mm[X.X in.±0.02in.]
 X.XXmm±0.25mm[X.XX in.±0.01in.]

Figure 19 Mechanical diagram

Pin Length Option

Device code suffix	L
-4	4.8mm ± 0.25mm
-6	3.8mm ± 0.25mm
-8	2.8mm ± 0.25mm
None	5.8mm ± 0.25mm

Pin Designations

Pin No.	Name	Function
1	Vin+	Positive input terminal
2	Remote ON/OFF	ON/OFF control terminal
3	Case	Case input terminal
4	Vin-	Negative input terminal
5	Vo-	Negative output terminal
6	Sense-	Negative remote sense
7	Trim	Output voltage trim
8	Sense+	Positive remote sense
9	Vo+	Positive output terminal

Soldering

The product is intended for standard manual or wave soldering.

When wave soldering is used, the temperature on pins is specified to maximum 260°C for maximum 7s.

When soldering by hand, the iron temperature should be maintained at 300°C ~ 380°C and applied to the converter pins for less than 10s. Longer exposure can cause internal damage to the converter.

Cleaning of solder joint can be performed with cleaning solvent IPA or similitive.

Assembly

The maximum length of the screw driven into heat-sink is 3.3mm.

Ordering Information

AGH360	-	48	S	12	P	B	-	6	Y
①		②	③	④	⑤	⑥		⑦	⑧

①	Model series	AGH: high efficiency half brick series, 360: output power 360W
②	Input voltage	48: 36V ~ 75V input range, rated input voltage 48V
③	Output number	S: single output
④	Rated output voltage	12: 12V output
⑤	Remote ON/OFF logic	Default: negative; P: positive logic
⑥	Baseplated	With baseplate

⑦	Pin length	-6: 3.8mm ± 0.25mm
⑧	RoHS status	L: RoHS, R6; Y: RoHS, R5

Model number	Description
AGH360-48S12B-6L	3.8mm pin length; negative on/off logic; with case; without thread inside mounting hole; R6 compliant

Hazardous Substances Announcement (RoHS Of China)

Parts	Hardarzous substances					
	Pb	Hg	Cd	Cr ⁶⁺	PBB	PBDE
AGH360-48S12B-6L	x	x	x	x	x	x

x: Means the content of the hazardous substances in all the average quality materials of the part is within the limits specified in SJ/T-11363-2006

√: Means the content of the hazardous substances in at least one of the average quality materials of the part is outside the limits specified in SJ/T11363-2006

Emerson Network Power Co., Ltd. has been committed to the design and manufacturing of environment-friendly products. It will reduce and eventually eliminate the hazardous substances in the products through unremitting efforts in research. However, limited by the current technical level, the following parts still contain hazardous substances due to the lack of reliable substitute or mature solution:

1. Solders (including high-temperature solder in parts) contain plumbum.
2. Glass of electric parts contains plumbum.
3. Copper alloy of pins contains plumbum