

Description

The AVQ100-24S05B is a single output DC/DC converter with standard quarter-brick outline and pin configuration. It delivers up to 20A output current with 5V output voltage. Above 93% ultra-high efficiency and excellent thermal performance makes it an ideal choice in telecom and datacom application.



Operational Features

- Delivers up to 20A output current
- Ultra-high efficiency 93% typ. at half load
- Wide input range: 18V ~36V
- Basic isolation
- Low output noise
- Excellent thermal performance
- No minimum load requirement
- Zero output capacitance
- RoHS 6 compliant

Control Features

- Remote control function (negative or positive logic optional)
- Remote output sense
- Trim function: 80% ~ 110%

Protection Features

- Input under-voltage lockout
- Output over-current protection
- Output over-voltage protection
- Over-temperature protection

Mechanical Features

- Industry standard quarter-brick pin-out outline
- Baseplate
- Pin length option: 4.8mm, 3.8mm
- Mounting hole option: thread hole, through hole

Safety & EMC

- Meets safety standards UL 60950-1, CSA-C22.2 NO. 60950-1, IEC/EN 60950-1 and GB4943
- Approved by UL and TUV
- Meets 2006/95/EEC and 93/68/EEC directives which facilitates CE marking in user's end product
- Meets conducted emission's requirements of FCC Class A and EN55022 Class A with external filter

Electrical Characteristics

Full operating ambient temperature range is -40°C to +85°C.

Specifications are subject to change without notice.

Parameter		Min.	Typ.	Max.	Unit	Notes & conditions
Absolute max. ratings						
Input voltage	Non-operating	0		50	V	100ms
	Operating	0		40	V	Continuous
Operating temperature		-40		85	°C	
Storage temperature		-55		125	°C	
Voltage at remote ON/OFF pin		-0.7		12	V	
Input characteristics						
Operating input voltage range		18	24	36	V	
Input under-voltage lockout	Turn-on voltage threshold	15	17	18	V	
	Turn-off voltage threshold	14	16	17	V	
	Lockout voltage hysteresis	1		3	V	
Max. input current				6.3	A	V _{in} = 0-V _{inmax} I _{out} = I _{omax}
No-load input current				0.2	A	
Standby input current			0.01	0.1	A	Remote OFF
Inrush current transient rating			0.2	1	A ² s	Figure 14
Input reflected ripple current			20	50	mA	Figure 3 Through 12μH inductor; Figure 14
Recommended input fuse				15	A	External Fast blow fuse is recommended; Figure 10
Input filter component values (C/L)			6.6\2.2		μF\μH	Internal values
Recommended external input capacitance			220		μF	Low ESR capacitor is recommended; Figure 10
Output characteristics						
Output voltage set point (standard option)		4.95	5	5.05	V	48V _{in} , full load
Output voltage line regulation			0.2		%	
			1		mV	

Parameter		Min.	Typ.	Max.	Unit	Notes & conditions
Output voltage load regulation			0.2		%	
			1		mV	
Output voltage temperature regulation			0.02		%/°C	
Total output voltage range		4.85	5	5.15	V	Over sample, line, load, temperature & life
Output voltage ripple and noise			20	140	mVpp	Figure 2 20MHz bandwidth; Figure 14
Operating output current range		0		20	A	
Output DC current-limit inception		22		28	A	Hiccup: auto-restart when over-current condition is removed
Output capacitance		0	470	5000	μF	High frequency and low ESR are recommended
Dynamic characteristics						
Dynamic response	50% ~ 75% ~ 50% $I_{o,max}$, 0.1A/μs		85		mV	Figure 4 Test condition: 25°C, nominal input voltage, see Figure 10
	Settling time		50		μs	Recovery to within 1% $V_{o,nom}$
	50% ~ 75% ~ 50% $I_{o,max}$, 1A/μs		95		mV	Figure 5 Test condition: 25°C, nominal input voltage, see Figure 10
	Settling time		80		μs	Recovery to within 1% $V_{o,nom}$
Turn-on transient	Rise time		8	30	ms	Full load, Figure 6
	Turn-on delay time		4	30	ms	Figure 6
	Output voltage overshoot		0		% V_o	Figure 6
Efficiency						
100% load			92.5		%	Figure 1
50% load			93		%	Figure 1

Electrical Characteristics (Continued)

Parameter	Min.	Typ.	Max.	Unit	Notes & Conditions	
Isolation characteristics						
Isolation voltage (conditions: 1mA for 60s, slew rate of 1500V/10s)	1500			V	Basic insulation, pollution degree 2, input to output	
	500			V	Functional insulation, pollution degree 2, input to baseplate	
	500			V	Functional insulation, pollution degree 2, output to baseplate	
Feature characteristics						
Switching frequency		310		kHz		
Remote ON/OFF control (positive logic)	Off-state voltage	-0.7		1.2	V	See Figure 11
	On-state voltage	3.5		12	V	
Remote ON/OFF control (negative logic)	Off-state voltage	3.5		12	V	
	On-state voltage	-0.7		1.2	V	
Output voltage trim range	4		5.5	V	See <i>Trim Characteristics</i> of <i>Application Note</i>	
Output voltage remote sense range			0.25	V		
Output over-voltage protection	120	130	150	%Vo,nom	Hiccup: auto-restart when over-voltage condition is removed	
Over-temperature shutdown		110		°C	Auto recovery; over-temperature protect (OTP) test point: see Figure 16	
Over-temperature hysteresis	5	10		°C		
Reliability characteristics						
Calculated MTBF (telcordia)		2.5		10 ⁶ h	Telcordia SR-332-2006; 80% load, 300LFM, 40°C T _a	

Electromagnetic Compatibility Requirements

Test Item	Regulations	Criteria	Notes & conditions
Conducted emission	EN 55022 DC input port, class A/B limits	A	See EMC Test Conditions
Immunity to electrostatic discharge	IEC/EN61000-4-2 Enclosure port, level 3	B	
Immunity to electrical fast transient	IEC/EN61000-4-4 DC input port, level 3	B	
Immunity to surges	IEC/EN61000-4-5 DC input port Line to ground (earth): 600V Line to line: 600V	B	
Immunity to continuous Conducted Interference	IEC/EN61000-4-6 DC input port, level 2	A	
Immunity to voltage dips and short interruptions and voltage variations	EN 61000-4-29 DC input port	B	

Criterion A: Normal performance during and after test.

Criterion B: For EFT and surges, low-voltage protection or reset is not allowed. Temporary output voltage fluctuation ceases after disturbances ceases, and from which the EUT recovers its normal performance automatically. For dips and ESD, output voltage fluctuation or reset is allowed during the test, but recovers to its normal performance automatically after the disturbance ceases.

Criterion C: Temporary loss of output, the correction of which requires operator intervention.

Criterion D: Loss of output which is not recoverable, owing to damage to hardware.

Qualification Testing

Parameter	Unit (pcs)	Test condition
Halt test	4 ~ 5	$T_{a,min}-10^{\circ}\text{C}$ to $T_{a,max}+10^{\circ}\text{C}$, 5°C step, V_{in} = min to max, 0 ~ 105% load
Vibration	3	Frequency range: 5Hz ~ 20Hz, 20Hz ~ 200Hz, A.S.D: $1.0\text{m}^2/\text{s}^3$, -3db/oct, axes of vibration: X/Y/Z Time: 30min/axis
Mechanical shock	3	30g, 6ms, 3axes, 6directions, 3time/direction
Thermal shock	3	-40°C to $+100^{\circ}\text{C}$, unit temperature 20cycles
Thermal cycling	3	-40°C to $+55^{\circ}\text{C}$, temperature change rate: $1^{\circ}\text{C}/\text{min}$, cycles: 2cycles
Humidity	3	40°C , 95%RH, 48h
Solder ability	15	IPC J-STD-002C-2007

Characteristic Curves

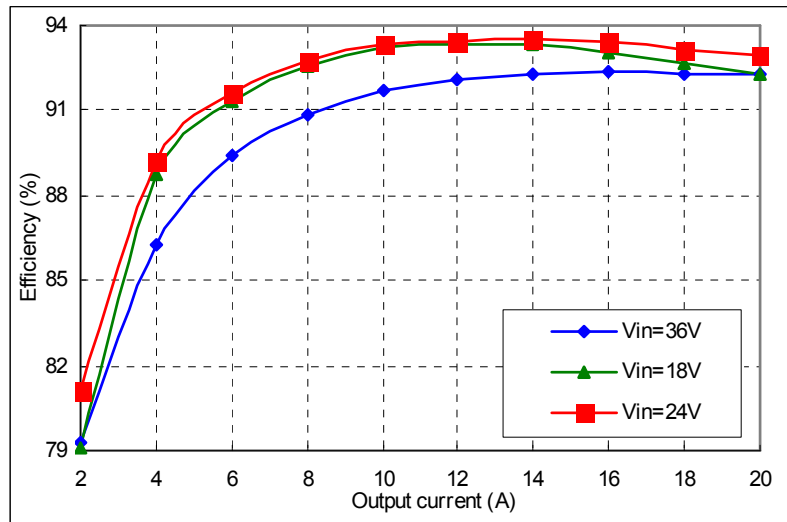


Figure 1 Efficiency vs. output current, Ta = 25°C, Vo = 5V

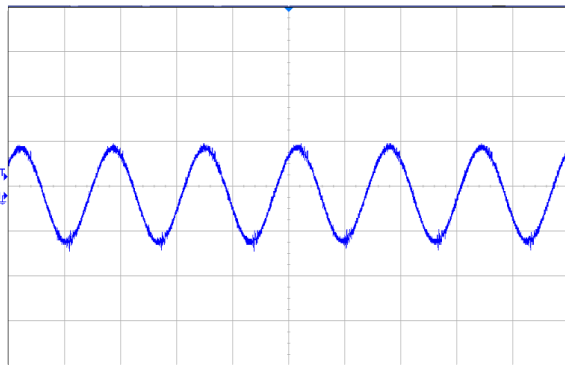


Figure 2 Output ripple & noise (2µs/div, 5mV/div), see Figure 14 for test configuration

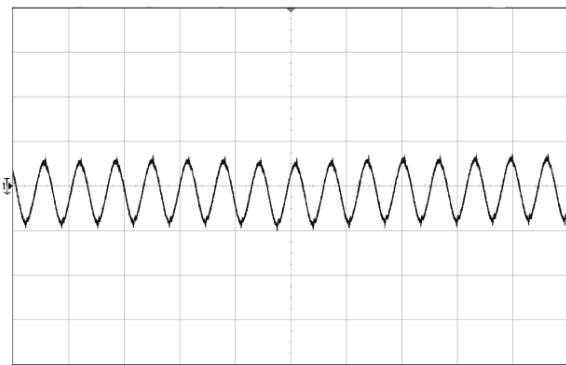


Figure 3 Input reflected ripple current (5µs/div, 10mA/div), see Figure 14 for test configuration

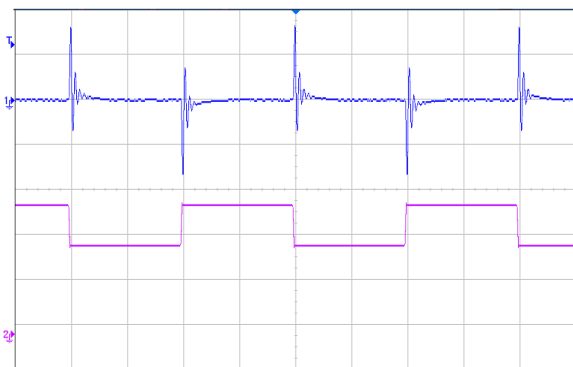


Figure 4 Dynamic response for 25% load step (50% ~ 75% ~ 50%) and 0.1A/µs slew rate, (2ms/div), see Figure 10 for test configuration; CH1-output voltage (50mv/div); CH2-output current (5A/div)

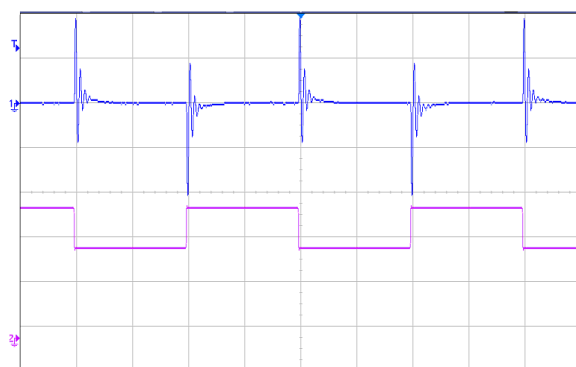


Figure 5 Dynamic response for 25% load step (50% ~ 75% ~ 50%) and 1A/µs slew rate, (2ms/div), see Figure 10 for test configuration; CH1-output voltage (50mv/div); CH2-output current (5A/div)

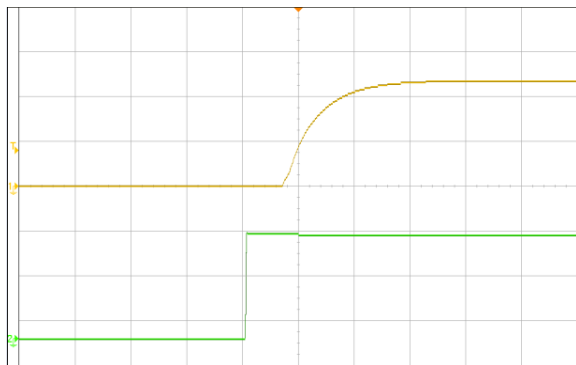


Figure 6 Output voltage startup by power on, (5ms/div), see Figure 10 for test configuration; CH1-output voltage (2V/div); CH2-intput voltage (10V/div)

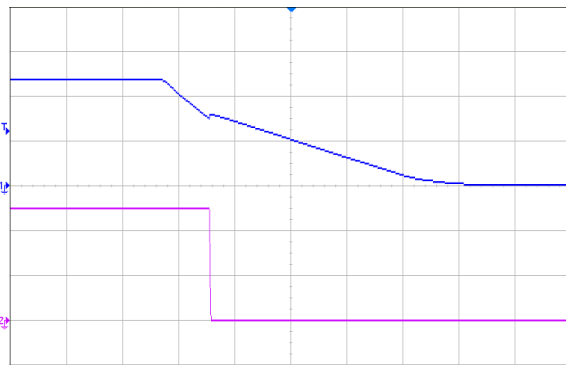


Figure 7 Output voltage shutdown by power off, (10ms/div), see Figure 10 for test configuration; CH1-input voltage (10V/div); CH2-output voltage (2V/div)

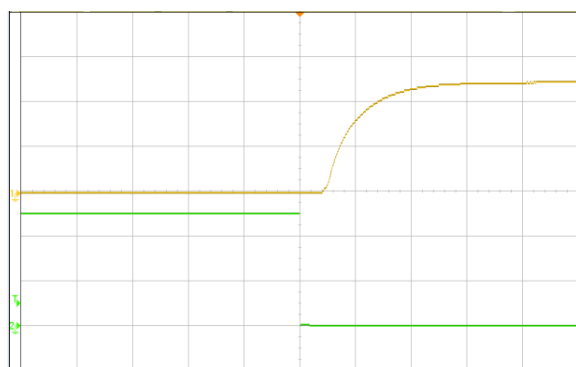


Figure 8 Output voltage startup by remote ON, (5ms/div), see Figure 10 for test configuration; CH1-output voltage (2V/div); CH2-remote ON voltage (2V/div)

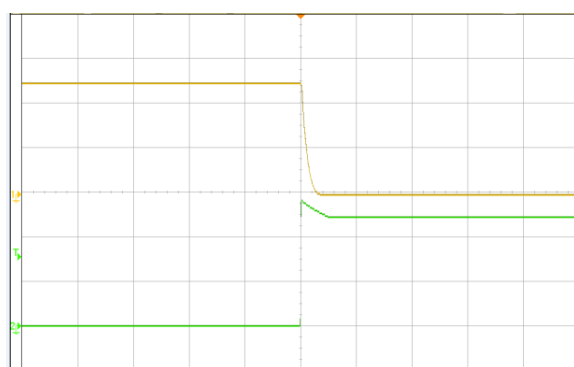


Figure 9 Output voltage shutdown by remote OFF, (500μs/div), see Figure 10 for test configuration; CH1-output voltage (2V/div); CH2-remote OFF voltage (2V/div)

Application Note

Typical Application

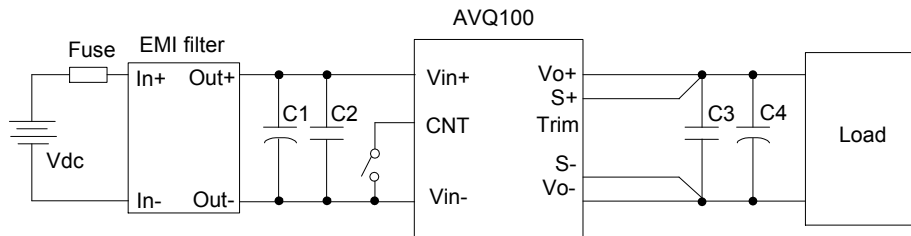


Figure 10 Typical application

C1: 220 μ F/50V electrolytic capacitor, P/N: UPM1H221MPD (Nichicon) or equivalent caps.

C2, C3: 1 μ F/100V X7R ceramic capacitor, P/N: C3225X7R2A105KT0L0U (TDK) or equivalent caps.

C4: 470 μ F/25V electrolytic capacitor, P/N: UPM1E471MHD (Nichicon) or equivalent caps.

Note: If ambient temperature is below -5°C, an additional 220 μ F tantalum capacitor (low ESR, ESR \leq 100m Ω) is needed for output.

Fuse: External fast blow fuse with a rating of 15A. The recommended fuse model is 216015.P from LITTLEFUSE.

Remote ON/OFF

Either positive or negative remote ON/OFF logic is available in AVQ100-24S05B. The logic is CMOS and TTL compatible.

Figure 11 is the detailed internal circuit and reference in AVQ100-24S05B.

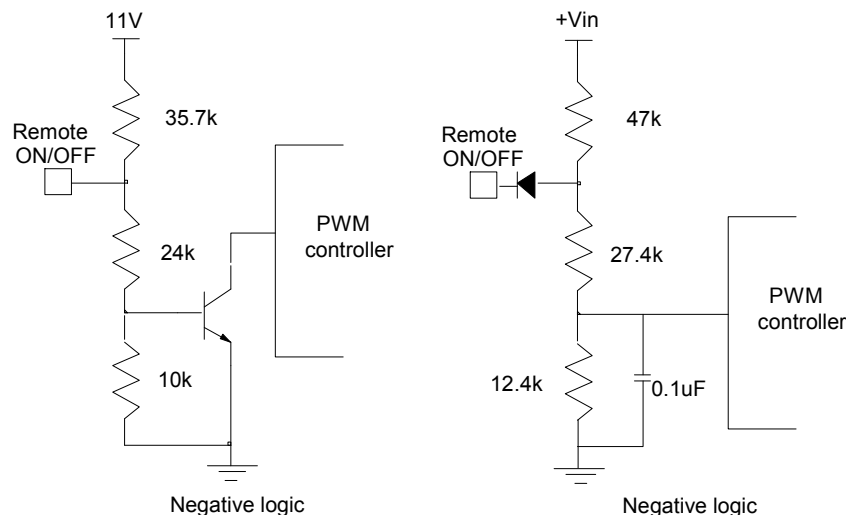


Figure 11 Remote ON/OFF internal diagram

Trim Characteristics

Connecting an external resistor between Trim pin and V_{o-} pin will decrease the output voltage, while connecting it between Trim and V_{o+} will increase the output voltage. The following equations determine the external resistance to obtain the trimmed output voltage.

$$R_{adj_down} = \left(\frac{510}{\Delta} - 10.2 \right) k\Omega$$

$$R_{adj_up} = \left(\frac{5.1 \times V_o (100 + \Delta)}{1.225 \times \Delta} - \frac{510}{\Delta} - 10.2 \right) k\Omega$$

Δ : Output error rate against nominal output voltage.

$$\Delta = \frac{V_{nom} - V_o}{V_{nom}} \times 100$$

V_{norm} : Nominal output voltage.

V_o : Desired output voltage.

For example, to get 5.5V (+110%) output, the trimming resistor is

$$\Delta = \frac{5.5 - 5}{5} \times 100 = 10$$

$$R_{adj_up} = \left(\frac{5.1 \times 5 \times (100 + 10)}{1.225 \times 10} - \frac{510}{10} - 10.2 \right) k\Omega = 167.8 k\Omega$$

The output voltage can also be trimmed by potential applied at the Trim pin.

$$V_o = (V_{trim} + 1.225) \times 2.04$$

Where V_{trim} is the potential applied at the Trim pin, and V_o is the desired output voltage.

When trimming up, the output current should be decreased accordingly so as not to exceed the maximum output power.

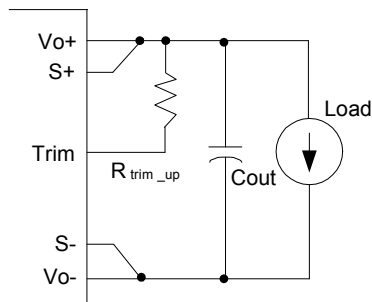


Figure 12 Trim up

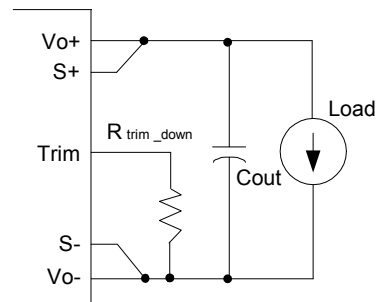


Figure 13 Trim down

Sense Characteristics

If the load is far from the unit, connect S+ and S- to the terminal of the load respectively to compensate the voltage drop on the transmission line. See Figure 10.

If the sense compensate function is not necessary, connect S+ to V_{o+} and S- to V_{o-} directly.

Input Ripple & Inrush Current And Output Ripple & Noise Test Configuration

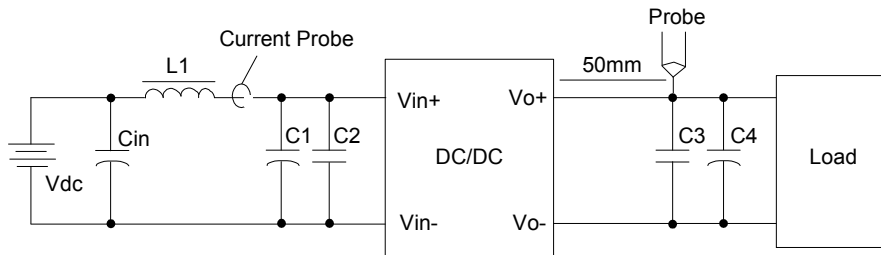


Figure 14 Input ripple & inrush current, ripple & noise test configuration

Vdc: DC power supply

L1: 12μH

Cin: 220μF/100V typical

C1 ~ C4: See Figure 10

Note: It is recommended to use a coaxial cable with series 50Ω resistor and 0.68μF ceramic capacitor or a ground ring of probe to test output ripple & noise.

EMC Test Conditions

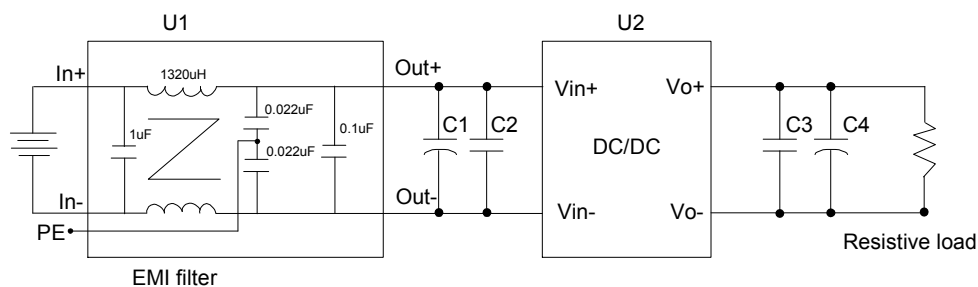


Figure 15 EMC test configuration

U1: Input EMC filter

U2: Module to test, AVQ100-24S05B

C1 ~ C4: See Figure 10

Baseplate: Be not connected

Thermal Considerations

The converter is designed to operate in different thermal environments and sufficient cooling must be provided.

Proper cooling of the DC/DC converter can be verified by measuring the temperature at the test point. The temperature at this point should not exceed 100°C.

The converter can operate in an enclosed environment without forced air convection. Cooling of the converter is achieved mainly by conduction from the baseplate to a heatsink. The converter can deliver full output power at 85°C ambient temperature provided the baseplate temperature is kept below 105°C.

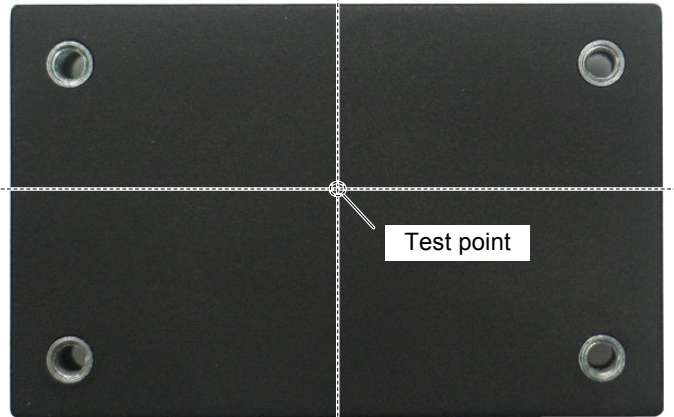


Figure 16 OTP test point and thermal test point on baseplate

The converter can also operate with a smaller heatsink and sufficient airflow. Figure 18 shows the derating output current vs. ambient air temperature at different air velocity with a specified heatsink. The typical test condition is shown in Figure 17.



Figure 17 Typical test condition, heatsink size (L x W x H): 57.9mm x 36.8mm x 6.3mm


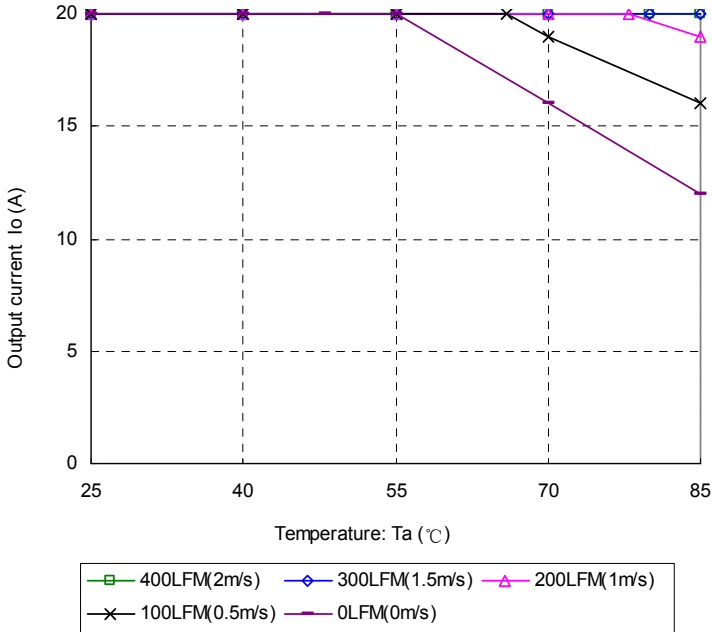



Figure 18 Output power derating, 24Vin, air flowing across the converter from pin 3 to pin 1

Mechanical Diagram

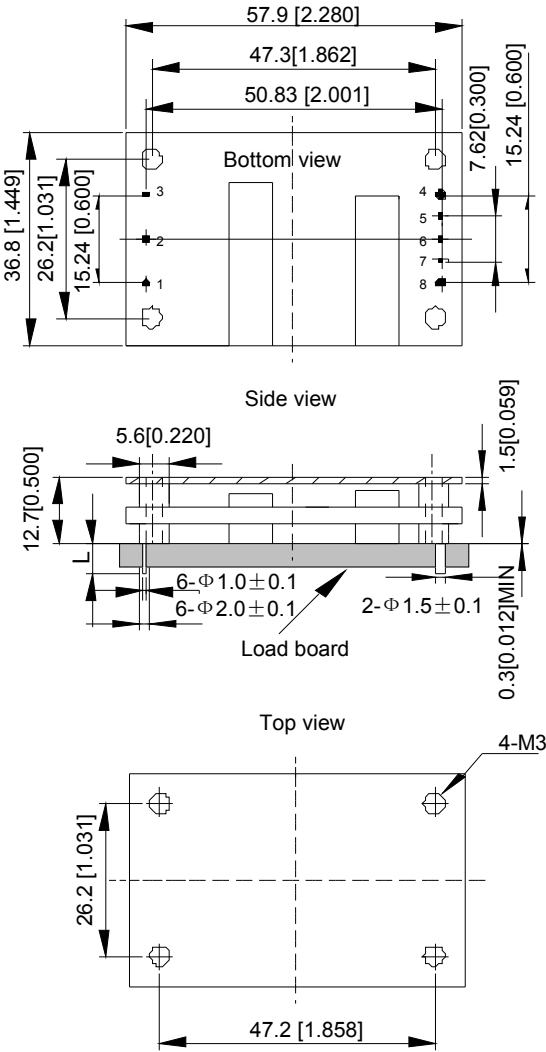

Unit: mm[inch] Bottom view: pin on upside
 Tolerance: X.Xmm \pm 0.5mm[X.X in. \pm 0.02in.]
 X.XXmm \pm 0.25mm[X.XX in. \pm 0.01in.]

Figure 19 Mechanical diagram (thread hole)

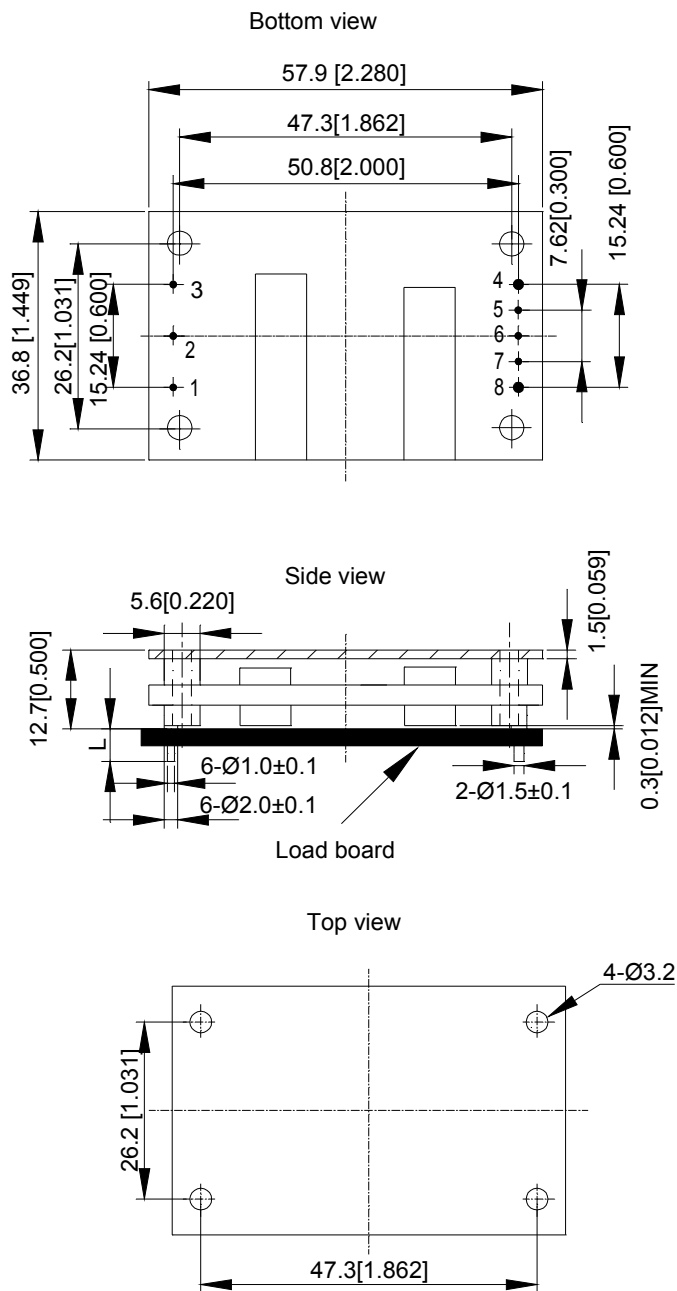

Unit: mm [inch] Bottom view: pin on upside

Tolerance: X.Xmm ± 0.5mm [X.X in. ± 0.02in.]
 X.XXmm ± 0.25mm [X.XX in. ± 0.01in.]

Figure 20 Mechanical diagram (through hole)

Pin length option

Device code suffix	L
-4	4.8mm ± 0.2mm
-6	3.8mm ± 0.2mm
-8	2.8mm ± 0.2mm
None	5.8mm ± 0.2mm

Pin Designations

Pin No.	Name	Function
1	V _{in+}	Positive input voltage
2	Remote ON/OFF	Remote control
3	V _{in-}	Negative input voltage
4	V _{o-}	Negative output voltage
5	S-	Negative remote sense
6	Trim	Output voltage trim
7	S+	Positive remote sense
8	V _{o+}	Positive output voltage

Soldering

The product is intended for standard manual or wave soldering.

When wave soldering is used, the temperature on pins is specified to maximum 260°C for maximum 7s.

When soldering by hand, the iron temperature should be maintained at 300°C ~ 380°C and applied to the converter pins for less than 10s. Longer exposure can cause internal damage to the converter.

Cleaning of solder joint can be performed with cleaning solvent IPA or similitive.

Assembly

The maximum length of the screw driven into the heatsink is 3.3mm.

Ordering Information

AVQ100	-	24	S	05	P	B	-	4	L	/T
①		②	③	④	⑤	⑥		⑦	⑧	⑨

①	Model series	AVQ: high efficiency quarter brick series, 100: output power 100W
②	Input voltage	24: 18V ~ 36V input range, rated input voltage 24V
③	Output number	S: single output
④	Rated output voltage	05: 5V output
⑤	Remote ON/OFF logic	Default: negative; P: positive logic
⑥	Baseplated	Default:no baseplated; B: baseplated
⑦	Pin length	-4: 4.8mm; -6:3.8mm
⑧	RoHS status	L: RoHS, R6; Y: RoHS, R5
⑨	Mounting hole	Default:thread hole; /T: through hole

Model number	Description
AVQ100-24S05-4L	4.8mm pin length; negative on/off logic; open frame; R6 compliant; for detailed information, refer to AVQ100-24S05 Technical Reference Notes
AVQ100-24S05P-4L	4.8mm pin length; positive on/off logic; open frame; R6 compliant; for detailed information, refer to AVQ100-24S05 Technical Reference Notes
AVQ100-24S05B-4L	4.8mm pin length; negative on/off logic; baseplated; thread hole; R6 compliant
AVQ100-24S05PB-4L	4.8mm pin length; positive on/off logic; baseplated; thread hole; R6 compliant
AVQ100-24S05PB-6L	3.8mm pin length; positive on/off logic; baseplated; thread hold; R6 compliant
AVQ100-24S05PB-6L/T	3.8mm pin length; positive on/off logic; baseplated; through hold; R6 compliant

Hazardous Substances Announcement (RoHS Of China)

Parts	Hazardous substances					
	Pb	Hg	Cd	Cr ⁶⁺	PBB	PBDE
AVQ100-24S05B	○	○	○	○	○	○
○: Means the content of the hazardous substances in all the average quality materials of the part is within the limits specified in SJ/T-11363-2006 √: Means the content of the hazardous substances in at least one of the average quality materials of the part is outside the limits specified in SJ/T11363-2006						
Emerson Network Power Co., Ltd. has been committed to the design and manufacturing of environment-friendly products. It will reduce and eventually eliminate the hazardous substances in the products through unremitting efforts in research. However, limited by the current technical level, the following parts still contain hazardous substances due to the lack of reliable substitute or mature solution:						
1. Solders (including high-temperature solder in parts) contain plumbum. 2. Glass of electric parts contains plumbum. 3. Copper alloy of pins contains plumbum						