

AIQ02R300-L

65 Watts

Total Power: 65 Watts
(28 V @ 2.32 A)

Input Voltage: 390 V

of Outputs: Single



Special Features

- 65 W Continuous power at 100 °C baseplate temperature
- High efficiency: up to 90%
- Low output ripple and noise
- Positive Enable function
- Excellent transient response
- Safety isolated low voltage control and monitoring
- High reliability
- Wide input voltage range
- Adjustable output voltage
- Regulation to zero load
- EU Directive 2002/95/EC compliant for RoHS

Safety

- **UL cUL** 60950 Recognized
- **TUV** EN60950 Licensed
- **CE** CE Mark

Electrical Specifications

Input

Input Range:	250 - 420 VDC
Input Surge:	500 V / 100 ms
Efficiency:	90% @ 28.0 V 65 W (typical)
Isolation Voltage:	2500 VDC

Output

Line Regulation:	0.2 % typical
Load Regulation:	0.2 % typical
Noise / ripple:	3% Vo,
Transient response:	5% Vo deviation with 100% to 80% full load @ 0.1 A / μ s
Overvoltage protection:	30 - 31.5 V
Current limit:	130% Io maximum

Control

Output Voltage Adjust:	90% - 105% (via external trim resistor)
Enable:	TTL compatible (positive enable logic)

Notes


Environmental Specifications

Operating ambient temperature range:	-40 °C to +100 °C (baseplate temperature)
Storage temperature:	-55 °C to +125 °C (environment temperature)
Overtemperature protection:	120 °C max
Demonstrated MTTF (Telcordia SR-332)	4.15Mhrs

Ordering Information

Input Voltage	Output Voltage	Efficiency	Model Number
390 V	28 V @ 2.32 A	89% typ	AIQ02R300-L

Mechanical Drawing

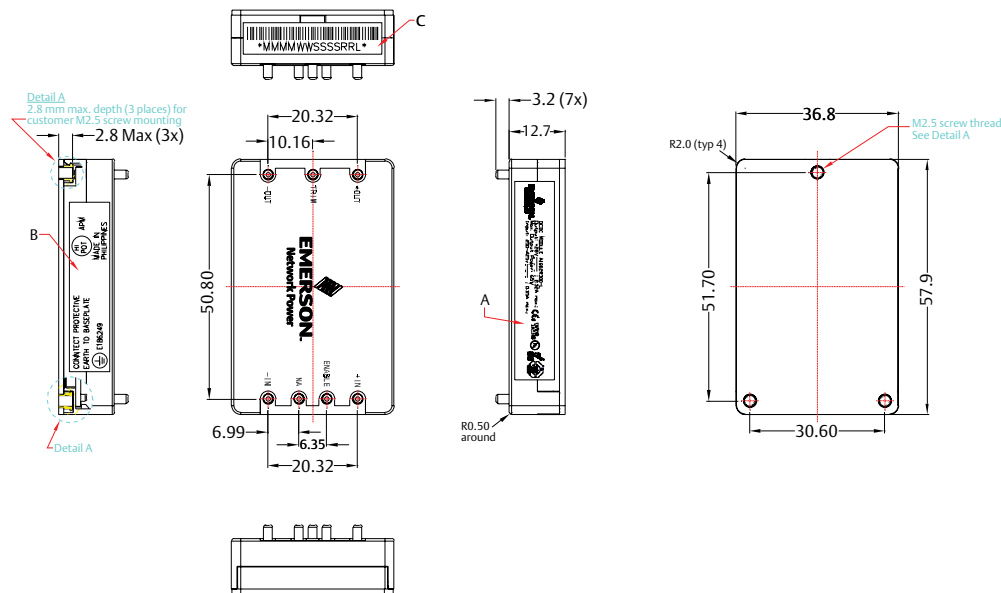

Converter Pins

No.	Label
1	+In
2	Enable
3	NA
4	-In
5	-Out
6	Trim
7	+Out

Americas

5810 Van Allen Way
Carlsbad, CA 92008
USA
Telephone: +1 760 930 4600
Facsimile: +1 760 930 0698

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
Telephone: +44 (0) 1384 842 211
Facsimile: +44 (0) 1384 843 355

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
Telephone: +852 2176 3333
Facsimile: +852 2176 3888

For global contact, visit:

www.Emerson.com/EmbeddedPower
techsupport.embeddedpower@emerson.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Emerson Network Power.

The global leader in enabling business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- Embedded Power**
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

EmersonNetworkPower.com

Emerson and the Emerson Network Power logo are trademarks of Emerson Electric Co. ©2012 Emerson Electric Co. All rights reserved.