


AVQ400 Series

396 Watts

Data Sheet

Total Power: 396 Watts
Input Voltage: 36 - 75 V
of Outputs: Single

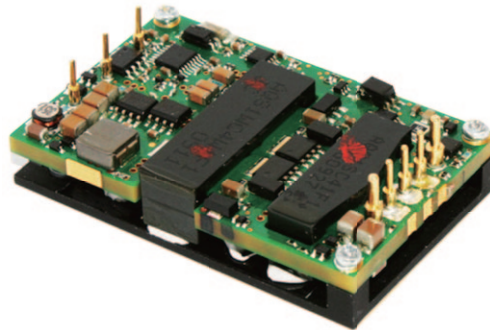

SPECIAL FEATURES

- 2:1 Wide input range
- Optimised for High density, small space applications
- Low ripple and noise
- Fixed switching frequency
- High efficiency
- High capacitive load capability
- Basic insulation system
- Openframe structure with baseplate option
- Output over current protection

SAFETY

- UL, cUL: UL60950
- TUV/CE: IEC/EN60950

Electrical Specifications

Input	
Input range:	36 - 75 VDC
Efficiency:	95% @ 12Vo
Output	
Voltage tolerance:	+/-1.6%
Line regulation:	24mV
Load regulation:	60mV
Noise/ripple:	3.3 Vo: 150mV
Over voltage protection:	Hiccup
Over temperature protection:	Auto-restart
Switching frequency:	140KHz
Temperature coefficient:	±0.02/°C
Isolation	
I/O isolation:	1500 VDC min.

Environmental Specifications


Operating ambient temperature range:	-40°C to +85°C
Storage temperature:	-55°C to +125°C
Humidity:	5% to 95% (non-condensing)
MTBF:	1.5 Million hours
RoHS Compliant	

Ordering Information

Model number	Input voltage	Output voltage	Power
AVQ400-48S12B-4L	36 - 75 Vin	12V @ 33A	396W
AVQ400-48S12B-6L	36 - 75 Vin	12V @ 33A	396W
AVQ400-48S12PB-4L	36 - 75 Vin	12V @ 33A	396W
AVQ400-48S12PB-6L	36 - 75 Vin	12V @ 33A	396W

- Standard version is negative enable
- "-6" = 3.8mm pin length
- "-4" = 4.8mm pin length
- "-L" = Rohs6 compliance
- "-P" = Positive enable
- "B" = Baseplate

Mechanical Drawings

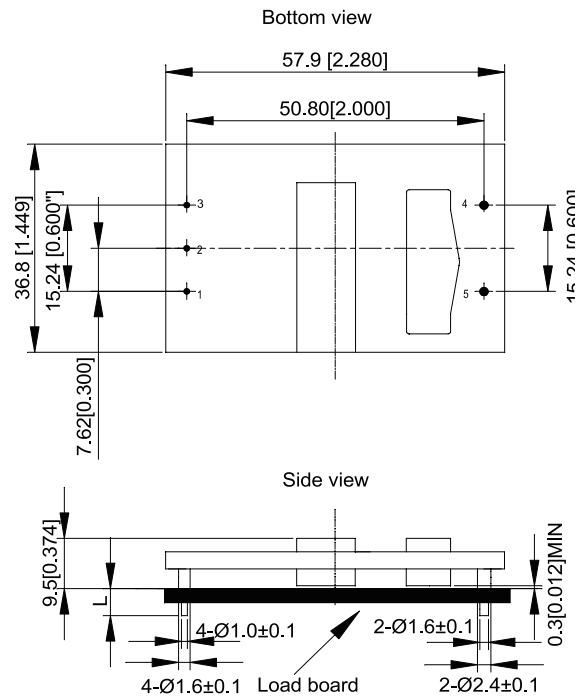

Unit: mm[inch]

Bottom view: pin on upsi

Tolerance: X.Xmm±0.5mm[X.X in.±0.02in.]

X.XXmm±0.25mm[X.XX in.±0.01in.]

Pin Assignments

Pin #	Function
1	+V in
2	Enable
3	-V in
4	-V out
5	+V out

Notes:

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 2 years
3. Label and logo appearance may vary from what is shown on mechanical drawings.

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
 Tempe, AZ 85282
 USA
 +1 888 412 7832

Europe (UK)

Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX
 United Kingdom
 +44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
 2 Wing Yip Street
 Kwun Tong, Kowloon
 Hong Kong
 +852 2176 3333



www.artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2014 Artesyn Embedded Technologies, Inc.

For more information: www.artesyn.com/power
 For support: productsupport.ep@artesyn.com