

CSV1100BP

1100 Watts Distributed Power System

Data Sheet

Front-end Bulk Power
Total Output Power: 1100 W
Input Voltage:
 100-127 Vac: 1050 W
 200-240 Vac: 1100 W

SPECIAL FEATURES

- 1100 W output power
- 1U power supply
- Active Power Factor Correction
- EN61000-3-2 Harmonic compliance
- Inrush current control
- 80PLUS® Platinum efficiency
- N+N Redundant
- Hot-pluggable
- Active current sharing
- PMBus® compliant
- Two-year warranty

COMPLIANCE

- Conducted/Radiated EMI Class A Limits
- RoHS
- IEC 60950

SAFETY

- UL/cUL
- CB Test Certificate
- CE Mark
- KC
- CCC/CQC
- BSMI



Electrical Specifications

| Input | | | | | | |
|-------------------------------|--|------|---------------------------|-------------------|------|-----------|
| Input range | 90-140 Vac 180-264 Vac | | | | | |
| Frequency | 47 Hz to 63 Hz | | | | | |
| Efficiency | Platinum level | | | | | |
| Max input current | 12.0 A @ 100 Vac | | | | | |
| Inrush current | 30 Apk | | | | | |
| Conducted EMI | Class A | | | | | |
| Radiated EMI | Class A | | | | | |
| Power factor | >0.95 beginning at 20% load | | | | | |
| Hold-up time | 12 ms at full load | | | | | |
| Leakage current | TBD | | | | | |
| Output | | | | | | |
| | Main DC Output | | | Standby DC Output | | |
| | MIN | NOM | MAX | MIN | NOM | MAX |
| Nominal setting | -0.20% | 12.2 | 0.20% | -3.5% | 12.0 | +3.5% |
| Total output regulation range | 11.59 V | | 12.81 V | 11.4 V | | 12.6 V |
| Dynamic load regulation range | 11.59 V | | 12.81 V | 11.4 V | | 12.6 V |
| Output ripple | | | 120 mVp-p | | | 120 mVp-p |
| Output current | 1.0 A ¹ | | 86.1 (Low) 90.2 (High) | 0.0 A | | 3.0 A |
| Current sharing | Within ±10% of full load rating, starting at 30% of rated load | | | N/A | | |
| Capacitive loading | 1,000 µF | | 20,000 µF | 50 µF | | 500 µF |
| Start-up from AC to output | | | 3,000 ms | | | 2,500 ms |
| Output rise time | 2 ms | | 20 ms | 2 ms | | 20 ms |

¹ Minimum current for transient load response testing only. Unit is designed to operate without damage at zero load.

Electrical Specifications

| Protections | | | |
|--------------------------------------|--------|-----|--------|
| Main Output | MIN | NOM | MAX |
| Overcurrent protection ² | >100% | | 125% |
| Oversvoltage protection ¹ | 13.8 V | | |
| Undersvoltage protection | | | 10.0 V |
| Overtemperature protection | | Yes | |
| Fan fault protection | | Yes | |
| Standby Output | | | |
| Overcurrent protection ³ | 3.4 A | | 4.4 A |
| Oversvoltage protection ³ | 13.8 V | | |
| Undersvoltage protection | | | 10.0 V |

¹ Latch mode

² THROTTLE warning of at least 1 second before latching off

³ Standby protection is auto-recovery

LED Indicators

| | Input Good (Green) | Output Good (Green) | Fault (Yellow) |
|---|--------------------|----------------------|----------------|
| Output ON and OK | On | On | Off |
| Standby mode (input present, main output off) or zero output mode | On | Blinking 1 Hz | Off |
| No input/Input out of range | Off | Off | Off |
| OCP, or over-subscription fault, or OVP, or fan failure, or OTP | On | Off | On |

Environmental Specifications


| | |
|---|--|
| Operating temperature | 5 to 50 °C continuous operation; allowable short term operation at 100% load up to 55 °C |
| Operating altitude | up to 10,000 feet ¹ |
| Operating relative humidity | +8% to 93%, non-condensing |
| Non-operating temperature | -40 to +70 °C |
| Shipping and storage relative humidity | +5% to 100%, including condensing |
| Non-operating altitude | up to 50,000 feet |
| Vibration and shock | Standard operating/non-operating random shock and vibration |
| RoHS compliance | Yes |
| MTBF | 500 k hours at 40 °C, 70% load, nominal input |
| Operating life | Minimum of 5 years at typical conditions |

Notes: ¹ PSU ambient temperature derated at 1°C per 600 ft above 3000 ft

Ordering Information



| Model Name | Ordering Part Number | Nominal Main Output | Standby Output | Airflow Direction |
|-------------|----------------------|---------------------|----------------|--------------------|
| CSV1100BP-3 | 700-014189-1400 | 12.2 V @ 90.2 A | 12 V @ 3.0 A | Standard (forward) |

Timing Diagram


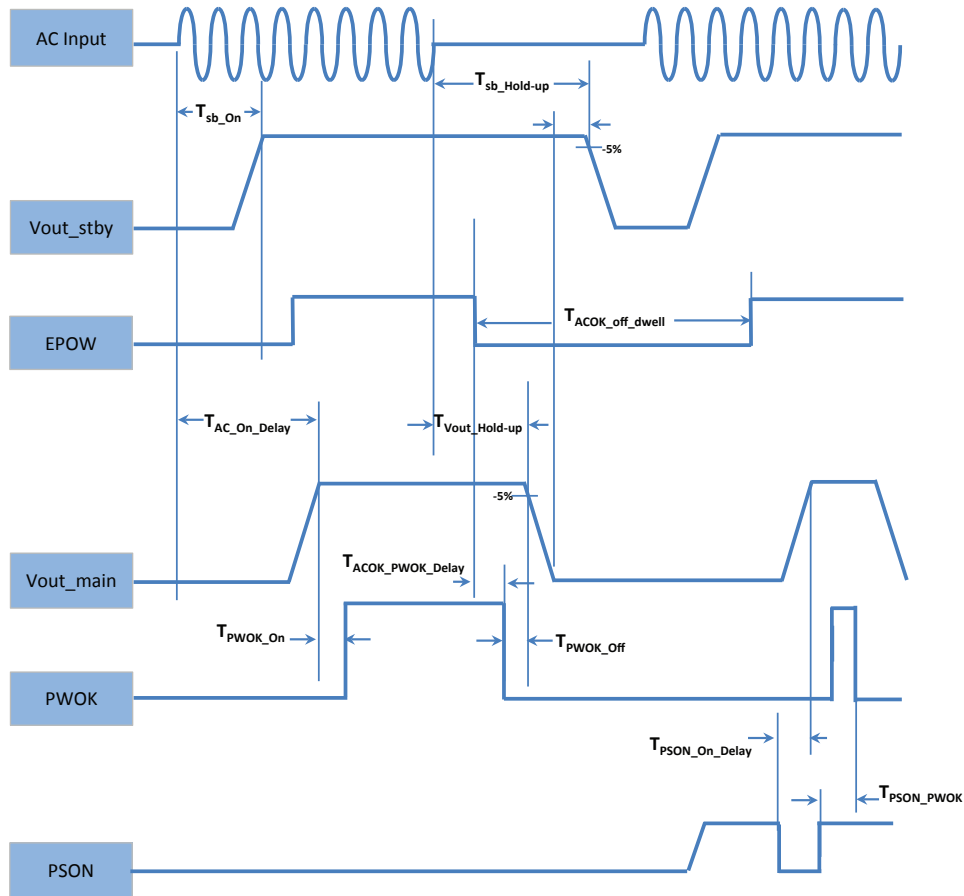


| Timing Specifications | | | | |
|-------------------------|---|-----|------|------|
| | Description | Min | Max | Unit |
| T_{sb_On} | Delay from AC being applied to standby output being within regulation | | 2500 | ms |
| T_{Vout_rise} | Rise time of output voltage going from 10% to 90% of the nominal regulation | 1 | 50 | ms |
| $T_{AC_On_Delay}$ | Delay from AC being applied to main output being within regulation | | 3000 | ms |
| T_{PWOK_On} | Delay from output voltages within regulation limits to PWOK assertion | 180 | 220 | ms |
| $T_{ACOK_PWOK_Delay}$ | Delay from ACOK going low to deassertion of PWOK | 6 | | ms |
| $T_{Vout_Hold-up}$ | Delay from loss of AC to main output being within regulation | 12 | | ms |
| $T_{sb_Hold-up}$ | Delay from loss of AC to standby output being within regulation | 50 | 1000 | ms |
| T_{PWOK_Off} | Delay from deassertion of PWOK to output falling out of regulation | 2 | | ms |
| T_{PSON_PWOK} | Delay from deassertion of PSON to deassertion of PWOK | | 1 | |
| $T_{PSON_On_Delay}$ | Delay from PSON assertion to output being within regulation | | 100 | ms |

Mechanical Outline

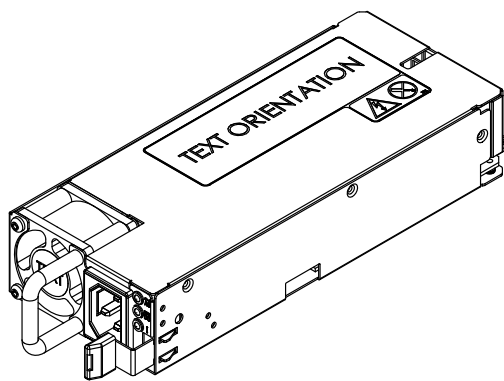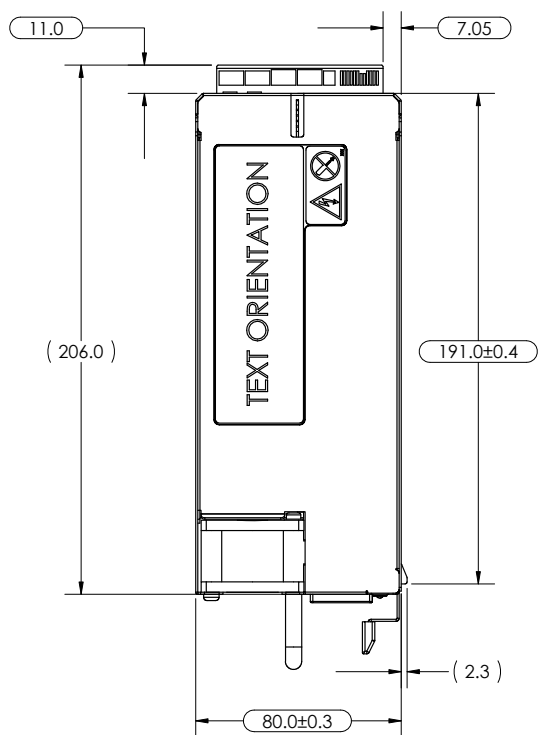

IT IS ACCEPTABLE FOR THE AC CONNECTOR HOUSING TO TOUCH THE LED HOUSINGS

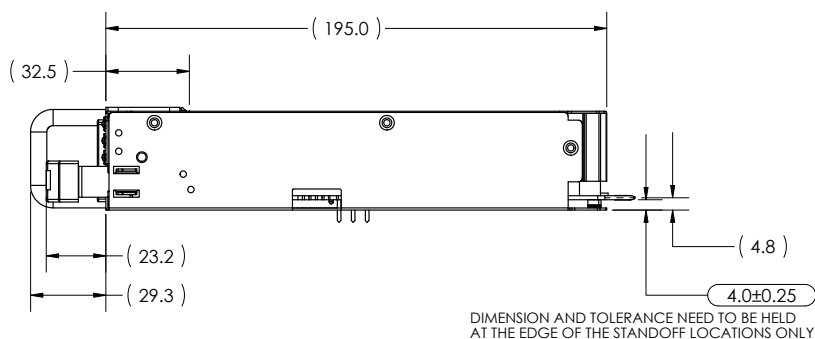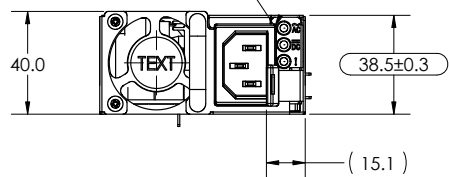


DIMENSION AND TOLERANCE NEED TO BE HELD AT THE EDGE OF THE STANDOFF LOCATIONS ONLY

ALL DIMENSIONS ARE IN MM. TOLERANCE IS +/-0.5MM


Connector Definitions

| | |
|------------------------------|--------------------------------------|
| Output connector part number | Card-edge |
| Mating connector part number | FCI Amphenol HPCE 10122238-320424FLF |

Power Supply Output Card Edge (Top Side)

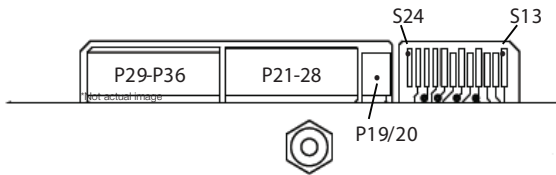

Power Supply Output Card Edge (Bottom Side)

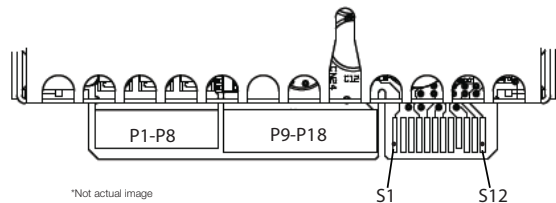

Output Connector Pin Configuration

| | | | |
|--------|------------|---------|-------------|
| S1 | Reserved | S13 | SMBUS_RESET |
| S2 | Reserved | S14 | Reserved |
| S3 | +Vsense | S15 | ADDRESS |
| S4 | PSKILL | S16 | PSON |
| S5 | Reserved | S17 | PSON |
| S6 | PWOK | S18 | ACOK |
| S7 | PRESENT | S19 | Reserved |
| S8 | SMB_ALERT# | S20 | THROTTLE |
| S9 | ISHARE | S21 | Reserved |
| S10 | RETURN | S22 | -Vsense |
| S11 | SDA | S23 | Reserved |
| S12 | SCL | S24 | Reserved |
| P1-P8 | Vo | P29-P36 | Vo |
| P9-P18 | RTN | P21-P28 | RTN |
| | | P19-P20 | VSB |

Power Supply Addressing (pin S15)

| Resistance (pull-down at system side, 1% tol or better) | Voltage (nom) | Hex Address |
|---|---------------|-------------|
| OPEN | 12.00 V | D0 |
| 280 k | 10.49 V | D2 |
| 212 k | 9.01 V | D4 |
| 68.1 k | 7.55 V | D6 |
| 40.2 k | 6.00 V | D8 |
| 23.7 k | 4.45 V | DA |
| 13.3 k | 2.98 V | DC |
| 5.76 k | 1.50 V | DE |

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
Tempe, AZ 85282
USA
+1 888 412 7832

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN
EMBEDDED TECHNOLOGIES

www.artesyn.com

Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2017 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com/power
For support: productsupport.ep@artesyn.com