

## ERM75 Series

75 Watts

### Data Sheet

**Total Power:** 75 W  
**Input Voltage:** 72 or 110 V  
**# of Outputs:** Single

#### SPECIAL FEATURES

- Small 57.9 x 36.8 x12.7 mm package
- Input ranges 43 - 101 Vdc or 66 - 160 Vdc
- High efficiency up to 92%
- No minimum load requirement
- Operating temperature range -40 °C to +80 °C
- Reinforced insulation 3000 VAC rms
- Undervoltage shutdown
- Remote On/Off
- Metal case with isolated baseplate
- Vibration and thermal shock to EN61373
- Safety meets EN60950-1 and Railway Standard EN50155 (IEC60571) and EN50121-3-2
- EN45545-2 flammability

#### SAFETY

- cUL/UL 60950-1
- IEC/EN 60950-1
- IEC/EN 50155
- CE Mark



#### Electrical Specifications

Input	
Input range	43 - 101 Vdc; 66 - 160 Vdc
Efficiency	92% @ 12 Vo
Output	
Voltage tolerance	±1.0%
Line regulation	±0.2%
Load regulation	±0.3%
Noise/ripple	24 V model: 150 mV, other models: 100 mV
Overload protection	150% typ of Io max, hiccup
Short circuit protection	Hiccup mode
Switching frequency	320 KHz
Isolation	
I/O isolation	Reinforced insulation, 3000 Vac rms; I/Case. O/Case: 1500 Vdc
Insulation resistance	1000 Mohm
Insulation capacitance	3000 pF


#### Environmental Specifications

<b>Operating ambient temperature range</b>	-40 °C to +80 °C
<b>Storage temperature</b>	-55 °C to +125 °C
<b>Humidity</b>	5% to 95% non-condensing
<b>MTBF</b>	209 Khrs calculated

## Ordering Information

Input Voltage	Output	Efficiency @ Max Load	Max Power	Model Number
43 - 101 V	5 V @ 15 A	89%	75 W	ERM15A72
43 - 101 V	12 V @ 6.25 A	92%	75 W	ERM06B72
43 - 101 V	15 V @ 5 A	92%	75 W	ERM05C72
43 - 101 V	24 V @ 3.125 A	91%	75 W	ERM03H72
66 - 160 V	5 V @ 15 A	89%	75 W	ERM15A110
66 - 160 V	12 V @ 6.25 A	91%	75 W	ERM06B110
66 - 160 V	15 V @ 5 A	91%	75 W	ERM05C110
66 - 160 V	24 V @ 3.125 A	90%	75 W	ERM03H110


## Mechanical Dimensions

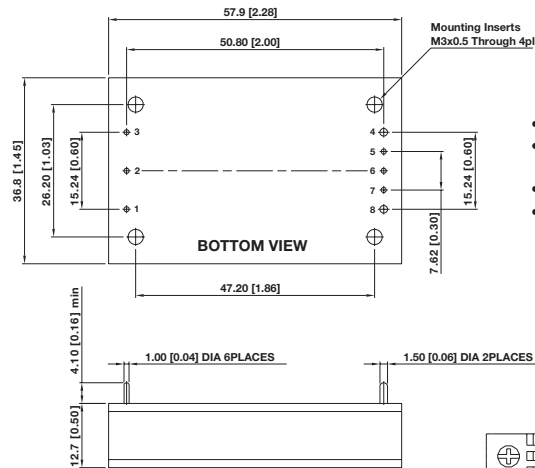

- All dimensions in mm (inches)
- Tolerance: X.X±0.5 (X.XX±0.02)  
X.XX±0.25 (X.XXX±0.01)
- Pin diameter  $\varnothing 1.0 \pm 0.05$  (0.04±0.002)
- Pin diameter  $\varnothing 1.5 \pm 0.05$  (0.06±0.002)

Pin Connections	
Pin	Function
1	+Vin
2	Remote On/Off
3	-Vin
4	-Vout
5	-Sense
6	Trim
7	+Sense
8	+Vout

### Heatsink (Option -HS)

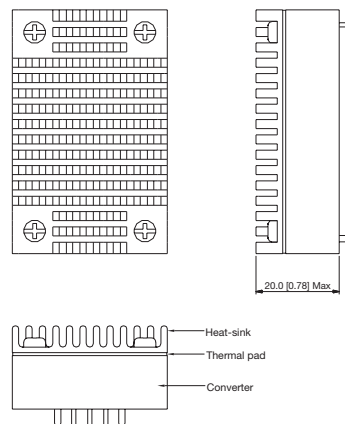

## WORLDWIDE OFFICES

### Americas

2900 S.Diablo Way  
 Tempe, AZ 85282  
 USA  
 +1 888 412 7832

### Europe (UK)

Waterfront Business Park  
 Merry Hill, Dudley  
 West Midlands, DY5 1LX  
 United Kingdom  
 +44 (0) 1384 842 211

### Asia (HK)

14/F, Lu Plaza  
 2 Wing Yip Street  
 Kwun Tong, Kowloon  
 Hong Kong  
 +852 2176 3333

**ARTESYN**  
 EMBEDDED TECHNOLOGIES

[www.artesyn.com](http://www.artesyn.com)

Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2017 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit [www.artesyn.com/legal](http://www.artesyn.com/legal).

For more information: [www.artesyn.com/power](http://www.artesyn.com/power)  
 For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)