


AVD75 Series

75 Watts

Data Sheet

Total Power: 75 Watts
Input Voltage: 36 - 75 V
of Outputs: Single

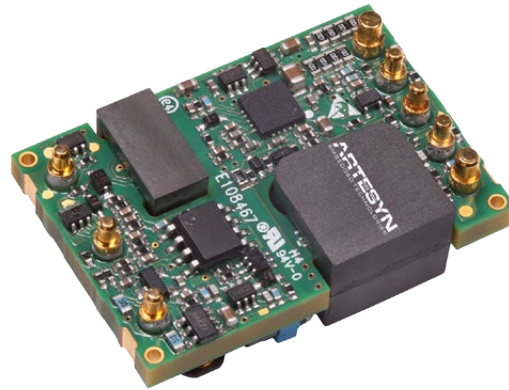

SPECIAL FEATURES

- 2:1 Wide input range
- Optimised for high density, small space applications
- Low ripple and noise
- Fixed switching frequency
- High efficiency
- High capacitive load capability
- Pre-bias start-up capability
- Basic insulation system
- Through hole or SMT termination
- Openframe structure with baseplate option
- Two year warranty

SAFETY

- UL, cUL: UL60950
- TUV/CE: IEC/EN60950

Electrical Specifications

Input	
Input range	36 - 75 Vdc
Efficiency	92% @ 3.3 V; 84% @ 1.2 V
Output	
Voltage tolerance	+/-1.5%
Line regulation	0.2%
Load regulation	Single output: 0.5% @ 3.3 V; 0.25% @ 1.2 V
Noise/ripple	3.3 Vo: 70 mV 1.2Vo: 45 mV
Over voltage protection Over temperature protection	Auto-restart
Switching frequency	1.2V: 270 KHz, 3.3V: 250 KHz
Temperature coefficient	±0.02 /°C
Isolation	
I/O isolation:	1500 Vdc min.

Environmental Specifications

Operating ambient temperature range	-40 °C to +85 °C
Storage temperature	-55 °C to +125 °C
Humidity	5% to 95% (non-condensing)
MTBF	2 Million hours
RoHS Compliant	

Ordering Information

Model number	Input voltage	Output voltage	Power
AVD75-48S3V3-6L	36 - 75 V _{in}	3.3 V @ 20 A	66 W
AVD75-48S3V3P-6L	36 - 75 V _{in}	3.3 V @ 20 A	66 W
AVD75-48S3V3B-6L	36 - 75 V _{in}	3.3 V @ 20 A	66 W
AVD75-48S3V3PB-6L	36 - 75 V _{in}	3.3 V @ 20 A	66 W
AVD75-48S1V2TL	36 - 75 V _{in}	1.2 V @ 25 A	30 W
AVD75-48S1V2-6L	36 - 75 V _{in}	1.2 V @ 25 A	30 W
AVD75-48S1V2B-6L	36 - 75 V _{in}	1.2 V @ 25 A	30 W

Notes:

Standard version is negative enable

-6 = 3.8 mm pin length



-T = Surface mount, reel tape package

-S = Surface mount, tray package

-L = RoHS 6 compliance

-P = Positive enable

Mechanical Drawings

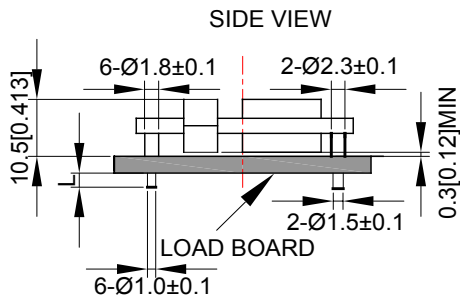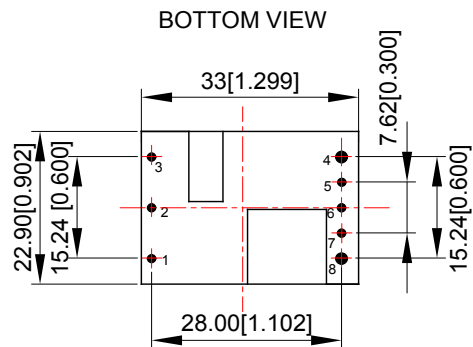

Notes:

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Label and logo appearance may vary from what is shown on mechanical drawings.

UNIT: mm[inch]

BOTTOM VIEW: pin on upside

TOLERANCE: X.Xmm±0.5mm[X.XX in.±0.02in.]

X.XXmm±0.25mm[X.XXX in.±0.01in.]

Pin Assignments

Pin #	Function
1	+V in
2	Enable
3	-V in
4	-V out
5	- Sense
6	Trim
7	+Sense
8	+V out

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
 Tempe, AZ 85282
 USA
 +1 888 412 7832

Europe (UK)

Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX
 United Kingdom
 +44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
 2 Wing Yip Street
 Kwun Tong, Kowloon
 Hong Kong
 +852 2176 3333



www.artesyn.com

Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2016 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com/power
 For support: productsupport.ep@artesyn.com